


SECTION
N. T. S.

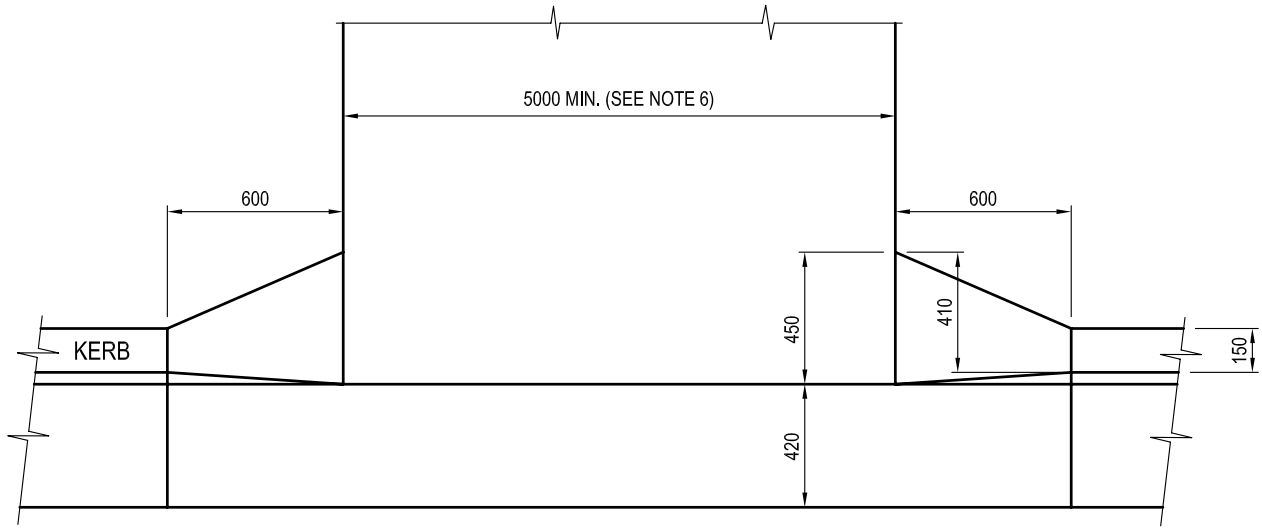

PLAN
N. T. S.

NOTES.

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. CONCRETE STRENGTH TO BE 20MPa AT 28 DAYS.
3. ALL EDGES TO BE SHAPED WITH AN EDGING TOOL.
4. JOINTS TO BE PLACED AT 4m TO 6m CENTRES.
5. VARIATIONS TO FOOTPATH CROSSFALL TO BE APPROVED PRIOR TO CONSTRUCTION.
6. WIDTH OF CROSSING MAY BE NOMINATED BY COUNCIL.
7. PROVISION FOR SERVICES UNDER SLAB TO BE INVESTIGATED PRIOR TO CONSTRUCTION.
8. CONCRETE SHALL HAVE A LIGHT BROOM FINISH.
9. INDUSTRIAL LAYBACK IS TO BE CONSTRUCTED INTEGRAL WITH THE CROSSING SLAB.

ISSUE	AMENDMENTS	DATE



GLOUCESTER SHIRE COUNCIL
INDUSTRIAL VEHICLE
CROSSING
STANDARD DETAILS.

PLAN No