



**MIDCOAST**  
council

**AUS-SPEC**

**Infrastructure Specifications**

**0041 Geometric Sealed Road Design**



**0041 GEOMETRIC SEALED ROAD DESIGN**

IMPORTANT: This document has been adapted from the NATSPEC suite of specification templates for use in the MidCoast Council area by both Council and industry. NATSPEC regularly updates the base templates (currently in April and October each year), and Council may incorporate changes into its version of AUS-SPEC from time to time. To assist in highlighting any changes made by Council to the NATSPEC templates, the following conventions are used.

- See Annexure M. at the end of this document which contains (where practical) MidCoast Council customisations (also known as 'office master' text). References to the Annexure are to also be inserted at relevant clauses in the main body of the document.
- Where content is added to the main body of the document, it is to be shown **in brown text like this**.
- Where content is deleted or excluded from the main body of the document, it is to be shown ~~struck through like this~~. Such clauses are to have no effect.

Where there is a conflict between main body text and MidCoast Council specific clauses, Council's specific clauses shall prevail.

## 1 GENERAL

### 1.1 INTRODUCTION

#### **Worksection application**

Description: This worksection is applicable to the geometric layout design of sub-arterial roadworks, for safety, improved amenity and to reduce pedestrian/vehicular conflicts. It applies to sub-arterial roads within the domain of urban and regional Councils. For arterial roads and highways, refer to Transport for NSW (formerly Roads and Maritime) requirements and Austroads guides.

Clause M5 in this worksection specifies which types of roads are required to be sealed or may be left unsealed. For design of unsealed roads, refer to *0052 Geometric rural road design – unsealed worksection*.

### 1.2 RESPONSIBILITIES

#### **Objectives**

General: Design and document a **sealed** road system to provide the following:

- Streets in the MidCoast area that promote and activate positive social interactions and exchanges, enhancing liveability and sense of place, while managing conflicts between transport modes and users.
- Improved urban structure and revitalisation.
- A safe, efficient, functional and economical road network, considering the volume, type and distribution of traffic that is appropriate to the existing built fabric and landforms, climate, heritage and cultural context of the area.
- Convenient and safe access for movement of pedestrians, vehicles and cyclists, **providing opportunities for users of differing mobility and ability levels without discrimination**.
- Appropriate access for **a range of truck combinations**, buses, emergency and service vehicles.
- A quality road network using integrated design that minimises maintenance costs.
- A convenient zone for public utilities, landscaping and street furniture, signals, signs and markings within the road reserve.
- Potential for expansion of the road network with minimum reconstruction by considering traffic growth and development nearby.
- **Management of on-street parking to meet the above objectives, and provision of convenient parking where appropriate, to support desired land uses**.
- Street lighting.

### 1.3 CROSS REFERENCES

#### General

Requirement: This is not a self-contained design document, conform to the following worksections:

- 0010 Quality requirements for design.
- 0042 Pavement design.
- 0043 Subsurface drainage (Design).
- 0044 Pathways and cycleways (Design).

### 1.4 STANDARDS

#### General

Note: Each AUSTRROADS Design Guide is to be read in conjunction with the corresponding **Roads and Maritime (RMS) Supplement to Austroads** publication.

Road design: To Austroads AGRD01 and Austroads AGRD02.

Geometric design: To Austroads AGRD03.

Intersection design: To Austroads AGRD04 and Austroads AGRD04A.

Traffic management: To Austroads AGTM series.

### 1.5 INTERPRETATION

#### Abbreviations

General: For the purposes of this worksection the following abbreviations apply:

- AADT: Average annual daily traffic.
- ASD: Approach sight distance.
- AU: Auxiliary.
- BA: Basic.
- CH: Channelised.
- DCP: Development Control Plan
- DDA: Disability Discrimination Act
- EDD: Extended design domain.
- HOV: High occupancy vehicle.
- LATM: Local area traffic management.
- MGSD: Minimum gap sight distance.
- NDD: Normal design domain.
- SISD: Safe intersection sight distance.
- TIA: Traffic Impact Assessment. Refer to Council's **Development Engineering Handbook**

#### Definitions

General: For the purpose of this worksection, the definitions given in Austroads AP-C87 and Austroads AGRD03 and the following apply:

The words 'street' and 'road' are used interchangeably throughout all parts of this worksection.

However, note that 'street' typically exclusively refers to lower order roads where the focus is on local traffic and pedestrian 'movement and place', rather than high speed and efficient movement of traffic on higher-order roads.

- Activity centre: Urban planning term for those places that are vibrant hubs where people shop work, meet, relax and often live.
- Approach sight distance: Relates to the ability of drivers to observe the roadway layout at an anticipated approach speed.
- Batter:
  - . The uniform side slope of walls, banks, cuttings, etc. Usually expressed as a ratio of horizontal to vertical.
  - . The amount of such slope or rake, usually expressed as a ratio of horizontal to vertical, distinct from grade.
  - . To form a uniform side slope to a wall, bank, or cutting.

- Carriageway: That portion of a road or bridge devoted particularly to the use of vehicles, that is between guide posts, kerbs, or barriers where these are provided, inclusive of shoulders and auxiliary lanes.
- Crossfall: The slope of the surface of a carriageway measured normal to the design or road centreline.
- Cycleway: Portion of a road or footpath for the exclusive use of cyclists.
- Extended design domain (EDD): The design domain for the assessment of existing roads. EDD is a range of values below the lower bound of the NDD.
- Footpath (pathway): A public way reserved for the movement of pedestrians, motorised wheelchairs and personal mobility devices.
- Horizontal alignment: The bringing together of the straights and curves in the plan view of a carriageway. It is a series of tangents and curves that may or may not be connected by transition curves.
- Landform: The type and shape of terrain, usually including topography, geological characteristics, coastlines, rivers and water bodies.
- Length of superelevation development: The transition of crossfall from a normal roadway on straight alignment to that of a fully superelevated crossfall on a circular curve.
- Level of service: A qualitative measure describing operational conditions within a traffic stream such as speed and travel time, freedom to manoeuvre, traffic interruptions, comfort, convenience and safety and their perception by motorists and/or passengers.
- Legibility distance: The maximum distance that the various types of traffic control signs or devices can clearly be seen under normal operating conditions and where there is no restriction to the line of sight.
- Minimum gap sight distance: Critical acceptance gap that drivers are prepared to accept when undertaking a crossing or turning manoeuvre at intersections.
- **Sub-arterial road**: All roads which become part of the public road system and are supplementary to **State classified highways and other arterial roads**. **Sub-arterial roads are usually Regional (classified) or Local roads owned by Council, and** may include distributor roads, collector **streets**, local **streets**, and access streets. The terminology of road hierarchy may be different in different states.
- Network: Defined as:
  - . A connected system of roads and infrastructure that heavy vehicles can travel on. Can be restricted to a certain class(es) of heavy vehicles (NHVR).
  - . Set of roads which provide a means of road based travel within a region. In transport terms it is defined in terms of links and nodes.
- Normal design domain (NDD): The design domain for a new road that defines the normal limits for the values of parameters that have traditionally been selected for new roads.
- Outer separator: The portion of the road reserve separating a through carriageway from a service road.
- Pathway: See footpath.
- Pavement: The portion of a carriageway placed above the subgrade for the support of, and to form a running surface for, vehicular traffic including subbase and base course.
- Plan transition: The length over which widening and shift is developed from the 'tangent-spiral' point to the 'spiral-curve' point; i.e. the length between the tangent and the curve.
- Reaction time: The time taken for a driver to perceive and react to a particular stimulus and take appropriate action. It is measured in seconds.
- Road network: A framework for movement by other modes, including pedestrian, bicycle and bus and plays a vital role in supporting neighbourhoods and town centres.
- Road reserve: The strip of public land between abutting property boundaries, specifically gazetted for the provision of public road and controlled by the definitions of the Roads Act (as per applicable State legislation). It includes the road carriageway, as well as footpaths, verges and landscape.
- Roundabout: A form of intersection channelisation in which traffic circulates clockwise around a central island and all entering traffic is required to give way to traffic on the circulating roadway.

- Safe intersection sight distance (SISD): Relates to an overall check that vehicles utilising the intersection have sufficient visibility to allow reaction and deceleration so as to provide adequate stopping distance in potential collision situations.
- Service road: A low traffic volume roadway parallel to and separated from an arterial road by an outer separator to limit vehicular access direct to the low volume road.
- Shoulder: The portion of formed and sealed carriageway that is adjacent to the traffic lanes and flush with the sealed surface of the pavement.
- Shoulder width: The measurement taken from the outer edge of the traffic lane to the edge of usable carriageway and excludes any berm, verge, rounding or extra width provided to accommodate guideposts and guard fencing.
- Side friction factor (f): A measure of the frictional force between the pavement and the vehicle tyre. Often confused with side friction in regard to traffic flow, which is the congestion effect that particular uses along the road shoulder have on reducing lane capacity (e.g. due to presence of side roads or on-street parking).
- Sight distance: The distance, measured along the carriageway, over which the visibility occurs between the driver and an object or between two drivers at specific heights above the carriageway in their lane of travel.
- Speed (as defined in Austroads **AGRD03 Road Geometric Design Section 3.2 Terminology**):
  - . 85th percentile speed: The speed at or below which 85% of the vehicles travel.
  - . Design speed: a fixed speed for the design and correlation of geometric features of a carriageway that influence vehicle operation. It is used for the calculation of various geometric design parameters. The design speed should not be less than the expected operating (85th percentile) speed for the road. If the operating speed varies along the road, the design speed may vary accordingly.
  - . Desired speed: the speed that drivers want to operate at and is a fundamental component of the Operating Speed Model.
  - . Operating speed: the 85th percentile speed of cars at a time when traffic volumes are low, and drivers are free to choose the speed at which they travel.
  - . Posted speed limit: a posted limit is achieved through signs that apply to a section of road or an area containing roads that have a similar function.
- State Road Authority: Transport for NSW (formerly Roads and Maritime Services)
- Stopping sight distance: The sum of the braking distance and the distance the vehicle travels at a design speed during a specified driver reaction time.
- Superelevation: A slope on a curved pavement selected to enhance forces assisting a vehicle to maintain a circular path.
- Traffic lane: That part of the roadway set aside for one-way movement of a single stream of vehicles.
- Traffic lane width: Traffic lanes are measured to the face of the kerb or to the lane line for multi-lane roads or roads with shoulders.
- Verge (rural): Defined area of the formation in rural roads outside the shoulder at the top of the batter slope.
- Verge (urban): That portion of the road formation not covered by the carriageway or footpath.
- Vertical alignment: The longitudinal profile along the centreline of a road consisting of series of grades and vertical curves.

## 1.6 HIERARCHICAL ROAD NETWORK

### Road functions


Requirement: Design the network so that the predominant function of the road is conveyed to all road users. Each class of road in the network serves a distinct set of functions and a hierarchical road network is essential to maximise road safety, residential amenity and legibility. Refer to the **Typical road hierarchy diagram**.

Traffic management at network level: Conform to Austroads AGTM04.

Access management categories and overall road management: Conform to Austroads AGTM05.

Traffic management objectives: Conform to Austroads AGTM06.

Road function and traffic hierarchy: Conform to Austroads AGTM08.

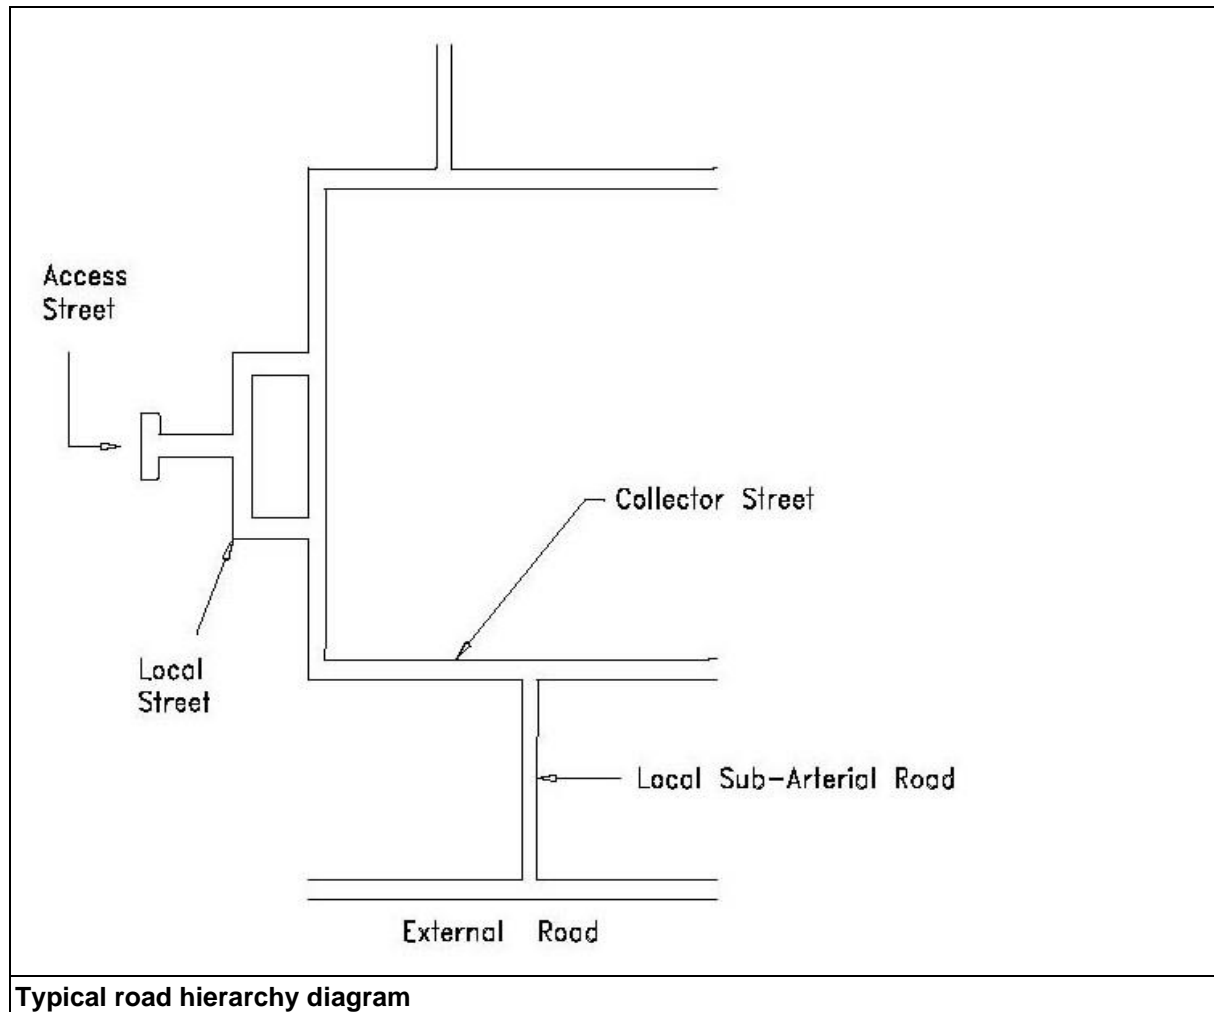

### Road classification

Terminology: The terminology used to describe each class of road varies from state to state. This worksection uses the functional categories common to the majority of states.

Functional classification of urban roads: To Austroads AGRD02 Table 2.3.

Functional classification of rural roads: To Austroads AGRD02 Table 2.2.

Levels of roads: The four generic (AUS-SPEC) distinct levels of sub-arterial roads are Access Street, Local Street, Collector Street and Distributor road. MidCoast Council recognises additional road classifications as set out in Clause M4.

Requirement: Within the MidCoast Council area, classify roads according to their purpose and traffic volume with reference to Clause M5.

For the purposes of this worksection the above terminology only defines the road hierarchy and the functions of the sub-arterial roads which are applicable to the AUS-SPEC Roadways package. For external State roads and highways, refer to the requirements of Transport for NSW (formerly Roads and Maritime).

### Emergency access

Requirement: Provide at least two access routes for emergency access for each street type in all subdivisions.

Exemptions: The final 200m of any journey may be provided by a single access road. Additionally, infill subdivisions with an ultimate yield less than 10 lots are not required to provide a second access road link.

Traffic calming: Provide calming geometry to conform with Austroads AGTM08.


### Access street

Road hierarchy: Lowest order road.

Function: Residential with amenity features which facilitate pedestrian and cycle movements.

Vehicular traffic is compliant, in terms of speed and volume, to amenities, pedestrians and cyclists.

The features of an example of an access street are shown in the **Typical access street layout**.

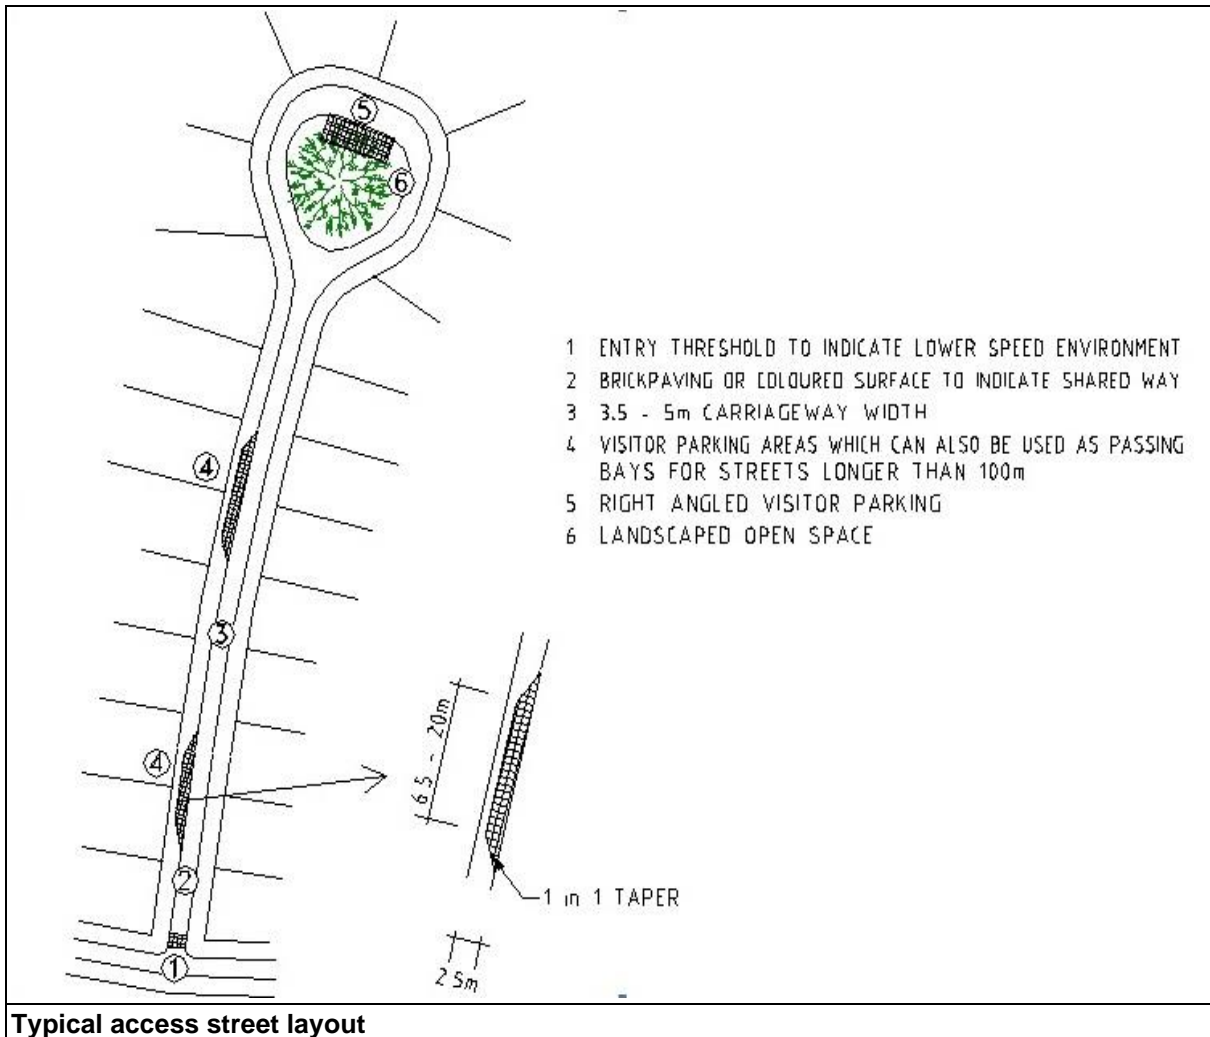


**Typical access street layout**

### Local street

Road hierarchy: Second lowest order road.

Function: A local residential street, balancing the status of the street in terms of access with residential amenity functions. Resident safety and amenity are dominant but to a lesser degree than access streets. Typically, local streets link access streets with collector streets. Refer to the **Typical local street layout**.



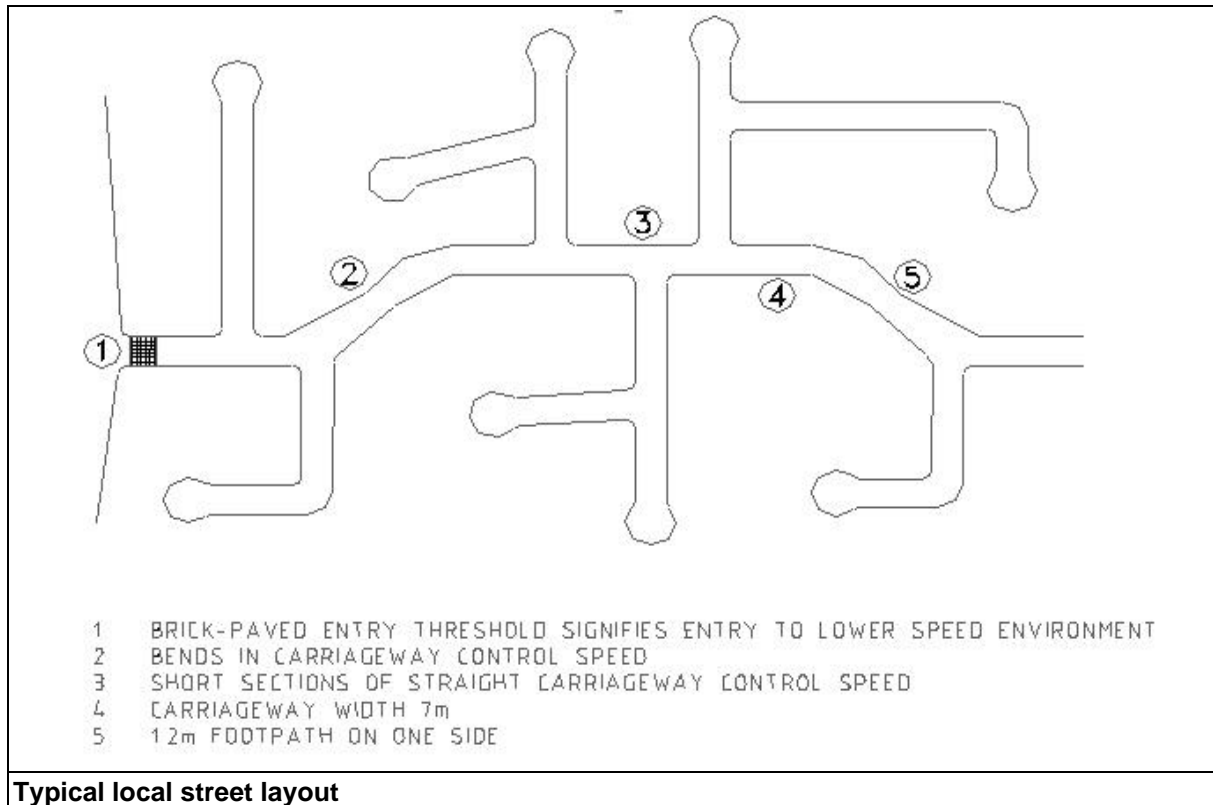


**Typical local street layout**

**Collector street**

Road hierarchy: Third lowest order road.

Function: Residential but also carries higher volumes of traffic collected from local streets and connects to Distributor roads for community transport and business access. There is a reasonable level of residential amenity and safety through restrictions of traffic volumes and speeds. However, amenity and resident safety do not have the same priority as in access streets or local streets. Refer to a **Typical collector street layout**.

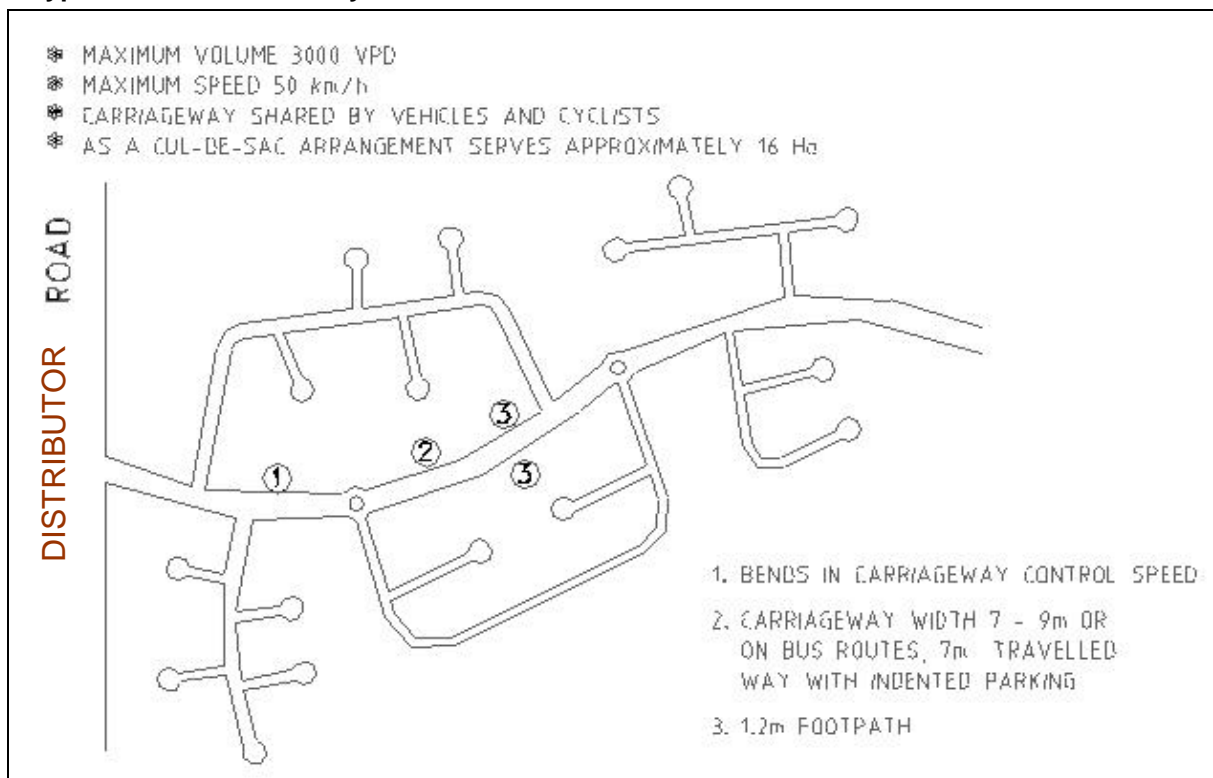




### Typical collector street layout

#### Distributor road

Road hierarchy: Highest order road within a residential development.

Function: Convenient and safe distribution of traffic generated by the development. It provides direct access for single dwelling allotments and access for multi-unit developments and non-residential land uses as appropriate. The Distributor road serves only the development and does not attract through traffic. Refer to typical **Distributor road layout** showing also connection to external roads and minor streets.

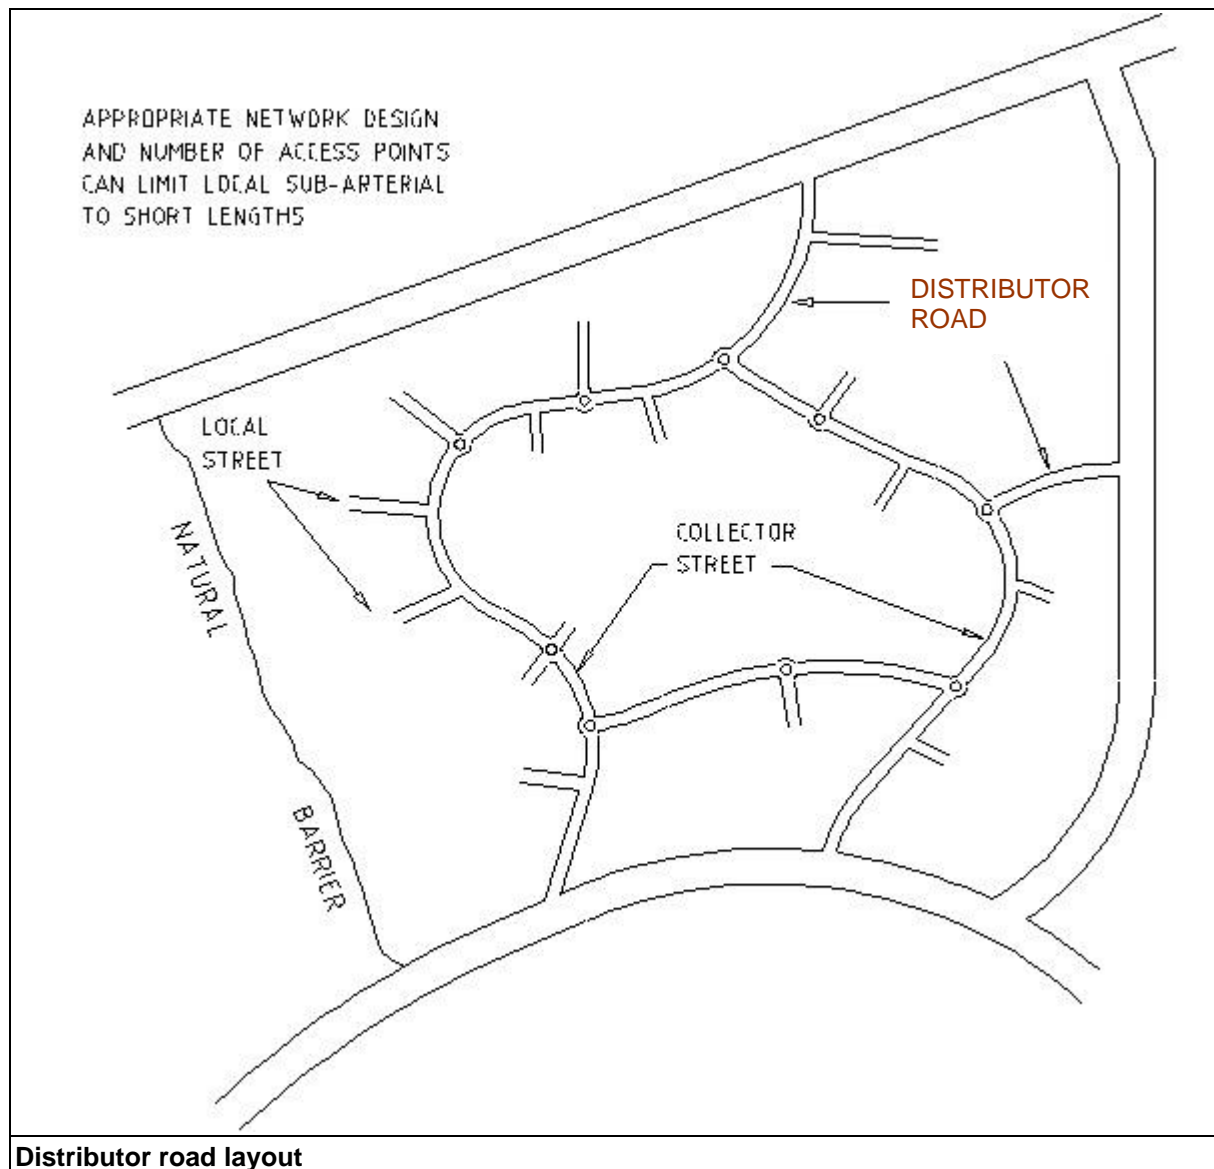

Additional road classifications used within the MidCoast Council area: See Clause M4.

## 2 PRE-DESIGN PLANNING

### 2.1 GENERAL

#### Planning stages

General: Plan and design road network to Austroads AG RTP. Carry out the following planning studies:

- Need study: A study to identify the requirements for new or upgrading the existing road network.

- Reconnaissance study: A qualitative study to identify all possible routes and feasibility of each route.
- Corridor study: A quantitative and qualitative study to select the preferred route.
- Route study: A graphical development of plans for all possible location of routes of the proposed development.

### **Geometric design elements**

General: The geometric road design comprises of the following:

- Selection of the following road network elements to be incorporated in the design:
  - . Cross section (e.g. widths of lanes, shoulders, medians and verges).
  - . Horizontal curves.
  - . Vertical curves and gradients.
  - . Intersections.
  - . Merge/diverge areas.
- Sizing of selected road network elements.
- Linking the road network elements into a three dimensional sequence.

## **2.2 PLANNING**

### **Road hierarchy**

Requirement:

- For new areas: Make sure each class of route reflects its role in the road hierarchy by its visual appearance and physical design and is distinct from established areas with a pre-existing road pattern.
- Functional classification: Routes differ in alignment and design according to the volume of traffic they are intended to carry, the desirable traffic speed, and other relevant factors. Most road authorities have developed a functional hierarchy.

### **Integrated design principles**

Requirement: Integrate design principles in the development of the road network to improve operational efficiency, road safety, public amenities while minimizing environmental impacts of noise, vibration and pollution.

*Resources: Good planning and design sets the foundation of a safe road environment. Refer to Austroads AP-R488 and Austroads AP-R518 for information on the safe system approach for local government. Austroads AP-T146 summarises the connection between road elements and crash sites. Austroads AGTM13 provides a comprehensive coverage of traffic management guidance affecting safety and human factors which impinge on road design.*

Requirement: Consider the following in integrated design planning:

- Transport and community needs.
- Integrate natural patterns and design in response to topography and landform.
- Design roads so that their appearance signifies their function and their intended speed posting.
- Improve the legibility.
- Provide a self reliant and minimal maintenance natural landscape.
- Integrate noise control in road network design.
- Avoid adverse visual impacts

Preparation for design: For design development inputs conform to Austroads AGRD08.

### **Conformance with Development Control Plan**

Pattern and width: Conform to any relevant Development Control Plan (DCP). In areas not covered by such a plan, pattern and width(s) are determined by Council.

### **Legibility**

General: Design for clear legibility in conformance with the following:

- Differentiation: Reinforce legibility by providing sufficient differentiation between the road functions.
- Landmark features: Emphasise distinct landmark features such as watercourses, mature vegetation or ridge lines within the structural layout so as to enhance the legibility.

- Introduced features: Provide the necessary legibility, by the inherent design and functional distinction of the road network in addition to introduced physical features such as pavement and lighting details

### 2.3 CONSULTATION

#### Council and other authorities

Council consultation: Before starting design, liaise with the Council's officer(s) for the following:

- Roadway layout and traffic management.
- Council's transport policy.
- **Water supply and sewerage layout.**
- Stormwater and subsurface drainage.
- Landscaping.

Other authorities: Consult with and seek approval for the development from the following government authorities:

- **Transport for NSW (formerly Roads and Maritime)**
- Rail authorities if the proposed project crosses the rail network.
- **Water NSW for Controlled Activity Approval for stream crossings**
- **Department of Primary Industry (Fisheries) for stream crossings**
- Other utility authorities.

#### Public consultation

Requirements: Undertake public consultation with the community and the other stakeholders in conformance with the Council policy.

#### Utilities services plans

Existing services in the development area/precinct: Liaise with the utility authorities affected by the scheme and if required, obtain service plans from the authorities of the proposed development area for above ground and below ground services.

Requirements for utility services: To SOCC.

Utility services location: To AS 5488.1 and AS 5488.2. Contact DIAL BEFORE YOU DIG to identify the locations of underground utility services pipes and cables.

## 3 DESIGN CRITERIA

### 3.1 DESIGN DOMAIN

#### General

Requirement: Adopt a design domain approach to Austroads AGRD02 clause 2.

Select EDD or NDD as follows:

- **NDD – New construction, significant lengths of reconstruction of existing roads, new carriageway of a duplication.**
- **EDD – Assessment of existing roads, improving the standard of existing roads in constrained situations, new carriageway of a duplication in constrained situations, temporary situations.** Austroads AGRD03 Appendix A provides the values of geometric road design for EDD.

In applying Austroads AGRD02 conform to the following:

- Use normal design domain values given in the guide wherever practical.
- Design values outside of the NDD are only used if approved in writing by the relevant road authority.
- If using EDD values, reduce the standard associated as appropriate for the prevailing local conditions. Generally, EDD is used for only one parameter in any application and not used in combination with any other minimum or EDD value for any related associated parameters.

### 3.2 ROAD NETWORK DESIGN CRITERIA

#### Routing

General: Provide routing as follows:

- Avoid through routes in the internal road system that are more convenient than the external road network in conformance with Austroads AGTM04 and Austroads AGTM08.

- Design and locate the external road network to provide routes that are more convenient for potential through traffic within the network.
- Provide access to major roads at intervals of no more than 1.5 km, of adequate capacity to accommodate through network movements.

### **Road links**

General: Provide for road links as follows:

- Hierarchy: Except in exceptional circumstances, do not link one road with another that is more than two levels higher or lower in the hierarchy.
- Restriction: Avoid access from Access streets or Local streets to an access-controlled arterial road.

### **Traffic flow**

Traffic flow and speeds: Make sure that the traffic design for flow and speeds on any road are compatible with the residential functions of that road.

Traffic management in Activity centres: Conform to Austroads AGTM07.

Traffic impacts assessment: Conform to Austroads AGTM12 clause 4.

### **Transport provisions**

Road layout: Conform to the requirements of the external road network and satisfy the transport provisions of an outline development plan.

Travel time: Minimise the time required for drivers to travel on all streets within the development.

Internal road connections: Provide intersections of internal roads as T-junctions or controlled by roundabouts.

Distributor road: Minimise the length of Distributor road within a development.

Access street: Restrict the maximum length of an Access street so that its status as a residential place is retained. Adopt design speed and volume to allow the integration of pedestrian, bicycle and vehicular movements without impairing residential convenience.

Pedestrian or bicycle network: Where Access streets form part of a pedestrian or bicycle network, provide for access links with adjoining access streets or open space systems for functional efficiency of the pedestrian and bicycle network.

## **3.3 DESIGN PARAMETERS**

### **Location**

Road network location: Select urban or rural.

### **Traffic volume and composition**

Requirements: Determine the following traffic characteristics to Austroads AGTM03:

- Traffic volume: Determine the volume of traffic to be carried by the road by conducting traffic studies and surveys to Austroads AGTM03.
- Roadway capacity.
- Level of service.
- Roadway conditions: Affect the roadway capacity and level of service depending on type of road and environment, traffic lane and shoulder widths, design speed, horizontal and vertical alignment.
- Terrain conditions: Generally classified as level, rolling and mountainous.
- Traffic composition: Generally classified as passenger cars, trucks and buses.
- Vehicle characteristics: Vehicle types and length or axle configurations.

Traffic lanes: Capacity analysis, level of service and design traffic volumes are used to determine the number of traffic lanes required.

### **Road classification**

Requirement: Determine the functional road classification of the network to be designed in conformance to the **Hierarchical road network**.

### **Vulnerable road users**

Pedestrians, cyclist and motorcyclists: Provide safe and convenient passage to vulnerable road users to Austroads AGRD03 clause 2.2.4 and Table 2.1.

### **Design speed and operating speed**

Requirement: Identify the operating speed for existing roads and select the design speed for both existing and planned lengths of the road.

**Alignment controls**

Requirement: Identify any mandatory and discretionary controls for the proposed alignment.

Mandatory controls are those which are not to be waived or varied, for legal, environmental and economic reasons.

**Design vehicle**

Requirement : Determine the type of vehicles that will be operating on the road network to establish the traffic lane widths, road geometry and intersection layout.

**Use of roads as emergency aircraft runway strip**

Requirement: In an emergency in remote areas, roads may be designed to operate as emergency aircraft runway strips to Austroads AGRD03 Appendix B.

**Environmental considerations**

Requirement: Evaluate the environmental considerations including topography, existing public utility services, visual intrusion, noise, vibration and pollution in the road design to Austroads AGRD03 clause 2.2.9.

Noise reduction: Consider vertical alignment adjacent to intersections and/or sensitive areas (e.g. schools, hospitals) to minimize braking noise.

Salinity prevention: For the design of roads through or adjacent to land known to be salt affected, take the following actions:

- Consultation: Consult with the relevant land and water resource authority.
- Early planning: Consider adjustments in horizontal and vertical line to avoid detrimental interference to and recharge of subsurface water within or adjacent to the road reserve.
- Landscaping: Select appropriate native deep-rooted species for plantings in association with road reserve works. Provide for plantations of sufficient size and density, multiple row belts and relatively close spacings, to lower the groundwater table.

Reference: Austroads AP-T78 and Austroads AP-T121 provides more guidance on the impact of salinity on pavement performance.

**Heritage considerations**

Requirement: Plan for the management of heritage assets. Heritage sites are recorded in the State heritage asset register, *Aboriginal Heritage Information Management System (NSW) and Council's Local Environmental Plan*. Some sites may contain archaeological sites relating to Aboriginal or non-Aboriginal occupation.

**Access management**

Requirement: Provide safe and appropriate access for the movement of traffic between the proposed road and the adjacent land.

**Drainage**

Drainage methods: Select the appropriate drainage methods to the *0043 Subsurface drainage (Design)* and *0074 Stormwater drainage (Design)*.

**Utility services**

Location: Locate the utility services in the road reserves such that there is minimum service relocations in case of future upgrades or growth in or around the proposed development.

**Topography**

Site specific features: Design the road with the terrain rather than against it and carry out the geotechnical investigation of the site to Austroads AGRD07.

### 3.4 DESIGN SPEED

**General**

Design parameters: Design geometric and engineering features on new roads, and upgrades for existing roads, to reinforce the desirable operating speed. Refer to the differences between Design Speed and Operating Speed in Clause 1.5 Interpretation and Austroads AGRD03 Section 3.2.

Reference: Road risk assessment and speed management to Austroads AP-R587 and the new Infrastructure risk rating (IRR) to Austroads AP-R587A. The IRR tool can be accessed via [www.irrtool.com](http://www.irrtool.com).

**Operating speed on urban roads**

Signposted speed limits: Consider Austroads AGTM05 Table 6.4 and Austroads AGRD03 Table 3.1 when determining the speed limit for new subdivision roads. For existing roads, a speed zone review is required and is to be initiated by Council with Transport for NSW (formerly Roads and Maritime).

- Typical desirable urban operating speeds: Shareway: 15 km/h.
- Access street / Commercial laneway: 25 km/h.
- Street adjacent to threatened or protected fauna habitat: 40 km/h.
- Local street: 50 km/h.
- Collector street: 60 km/h.
- Distributor road / Industrial road: 60/80 km/h.

### Operating speed on rural roads

Criteria: Determine the minimum design speed value for other elements for Council Works on the concept of a speed environment as outlined in Austroads AGRD03 clause 3.4.

Restricted access to major roads: Design all rural subdivisions to control and minimise access to major roads. Limit access to one point on to local, collector, local sub-arterial or arterial road networks.

### Desired speed

Existing rural roads: For upgrade or restoration projects on existing rural roads, measure the operating speed from the suitable section of the existing road. Account for any increase in operating speed due to improved cross section and ride quality.

New rural roads: Select the desired speed from Austroads AGRD03 Table 3.3.

### Operating speed model

Model: If insufficient traffic speed data is available, determine the operating speed using the operating speed model to Austroads AGRD03 clause 3.6 to predict the operating speed of cars along the length of the road.

### Vehicle speed

~~Requirement: Determine the acceptable vehicle speed for the particular section of road to Austroads AGRD03 clause 3.2.5.~~

### Operating speed for temporary works

Requirement: Determine the operating speed for temporary roads to Austroads AGRD03 clause 3.8.

### Hazard reduction

Low speeds: Adopt a low design speed to discourage speeding. Avoid vertical or horizontal curves of low design speed located in otherwise high speed sections, to minimise the risk of creating a potentially dangerous section of road.

Hazardous features: Make hazardous features visible to the driver. Adopt traffic engineering measures that help a driver avoid errors of judgement.

Road safety barriers: Assess and design road safety barriers to AS/NZS 3845.1.

## 3.5 CROSS-SECTION

### Road reserve characteristics

Cross section: Provide for all road functions including the following:

- Safe and efficient movement of all users (including emergency vehicles and operation of buses on connector streets)
- Provision for parked vehicles. Give particular attention to access for disabled persons in conformance with the *Disability Discrimination Act 1992*.
- Access to public transport.
- Buffer from traffic acoustic nuisance for residents.
- Provision of public utilities and WSUD devices.
- Streetscaping.
- Requirements of *Disability Discrimination Act 1992*.

Operational aspects: Conform to the following:

- Allow vehicles to proceed safely at the operating speed intended for that level of road in the network with only minor delays in the peak period.



- Take into consideration the restrictions caused by parked vehicles where it is intended or likely that this will occur on the carriageway.
- Vehicles include trucks, emergency vehicles and buses, on some roads. (Refer to **Bus route criteria table**).

Design life: To Austroads AGRD01 Table 3.1.

### Type of cross-section

General: Determine the type of cross-section considering the following factors:

- Location: **urban / rural**
- Function of the road: **through route / local access**
- Type of road: **new / existing**
- Traffic volume: **As determined by the Traffic Impact Assessment (TIA) and DA conditions (see Council's Development Engineering Handbook for TIA guidance).**
- Public transport: **As determined by the TIA and DA conditions (see Council's Development Engineering Handbook for TIA guidance).**
- Environmental constraints: **topography, existing utilities, existing road reserve widths, vegetation, geology etc.**
- Availability of construction materials: **Alternative pavement and wearing course technologies or materials may be considered by Council provided they meet any DA conditions, with evaluation in accordance with Council's **AUS-SPEC 0042 Pavement Design** worksection.**

Design life: To the DA conditions of consent or (if not otherwise specified) Clause M5.

### Traffic lanes

General: Determine the number and width of the traffic lanes required depending upon the traffic volume, presence of cyclists, available road reserve width and the side friction **for traffic flow** constrained by abutting **accesses and on-street parking**.

Standard traffic lane width for urban and rural roads: 3.5 m.

Reduced lane width: **For access streets, or if there are site constraints, the traffic lane width may be reduced to 3m in each direction for low speed roads with infrequent truck traffic, subject to the approval of the relevant road authority. In these cases, provide adequate sight lines, kerb radii and additional lane widening on curves to cater for the swept path of up to 12.5m heavy rigid trucks (see Clause 3.8 and Austroads AGRD03 Table 7.12).**

Refer also to Clause M4 for recommended carriageway widths for specific road types used in the MidCoast area.

Urban arterial road widths: To Austroads AGRD03 Table 4.3.

Single carriageway rural road widths: To Austroads AGRD03 Table 4.5.

Divided carriageway rural road widths: To Austroads AGRD03 Table 4.6.

Pedestrians and cyclists: Provide for the safety of pedestrians and cyclists where it is intended they use the carriageway by providing sufficient width and control of landscaping to provide sight distances.

### Crossfall

Pavement crossfalls: Crown the roads on centreline. Provide crossfall to drain the carriageway on straights and curves and to provide superelevation on horizontal curves.

Pavement crossfall on straights: To Austroads AGRD03 Table 4.2

Recommended minimum crossfall: 2%.

Offset crown lines: In urban areas there are many factors that force departure from the recommended crossfalls. The difference in level between the road alignments can be taken by offsetting crown lines or by adopting one way crossfall. Adopt sustained crossfalls with a minimum of 4% and a maximum of 6%.

Rate of change: Do not exceed the rate of change of crossfall in the following conditions:

- Through traffic: 6% per 30 m.
- Free flowing turning movements: 8% per 30 m.
- Turning movements for which all vehicles are required to stop: 12% per 30 m.

Precedence of crossfall over grade: Conform to the following:

- The crossfall on a Collector street or Distributor road will take precedence over the grade in Local or Access streets. Maintain the crossfall on the major road and adjust the local street levels to suit.



- A rate of change of grade of 2% in the kerb line of the side street relative to the centre line grading is a reasonable level.

### Shoulders

Function: Design road shoulders to carry out the following functions:

- Structural: Provide lateral support to the road pavement layers.
- Traffic: Provide an initial recovery for an errant vehicle, emergency use, a refuge for stopped vehicles and space for cyclists.

Shoulder width: Provide the following:

- Generally: 1.5 – 2 m.
- Exemptions: normally no additional shoulder width is required for local streets and lesser order streets in addition to the traffic lane widths, unless on-street parking is desirable. For collector streets, a reduced shoulder can be accepted down to a total carriageway width of 8.5 to 9m. See Clause M5.
- For higher volume roads: 2.5 – 3 m.

Shoulder sealing: Seal the shoulders partially (in rural or rural-residential areas) or wholly to reduce maintenance costs and to improve moisture conditions under pavements. Conform to the following sealed widths:

- Minimum width of shoulder seal for AADT < 1000: 0.5 m.
- For wet areas where moisture control is required:
  - . Desirable shoulder seal width: 0.5 m.
  - . Preferred shoulder seal width: 1 m.
- For discretionary stopping of cars: 2.5 m.
- For bicycles, minimum sealed width: 2 – 3 m.

Reference: For more information on shoulder sealing see Austroads AGRD03 clause 4.3.3.

Shoulder crossfall: Provide shoulder crossfall to Austroads AGRD03 clause 4.3.5.

### Verge

General: Design the verge to perform the following functions:

- A traversable transition between the shoulder and the batter slopes.
- A firm surface for stopped vehicles.
- Space for installation of guideposts and road safety barriers.
- Reduce scouring due to stormwater run-off.
- Facilitate pedestrian movements in urban areas where a dedicated pedestrian footpath is not required to be provided (refer to Council's **Development Engineering Handbook** for footpath requirements).

Minimum width: To Austroads AGRD03 Table 4.9. In urban areas where a dedicated pedestrian footpath is not provided on at least one side of the road, provide at least 3m verge width at standard crossfall for use as a footway.

Verge rounding: Provide verge and batter toe rounding to minimise rollover accidents to Austroads AGRD03 Table 4.10.

Verge slope: Provide verge slopes for local roads or behind kerb and channel in cut:

- Without rounding: 5%.
- With rounding: Initial slope same as abutting shoulder.

### Verges and property access

Criteria: Design the verge with consideration of utility services, the footpath width, access to adjoining properties, likely pedestrian usage and preservation of trees.

Restriction: If normal crossfalls are impracticable adopt low level footpaths.

Crossfalls in footpath paving: < 2.5% to Austroads AGRD06A.

Longitudinal grade: Conform to the following:

- Parallel to the longitudinal grade of the road.
- Limit: May be steeper than 5%.

Driveway profile: Conform to the following:

- Provide a vehicular driveway centreline profile for the property access that complies with Council's driveway standard drawings (available on the website), to limit vehicles scraping and to ensure stormwater is contained within the road.
- If the design does not comply with Council's standard drawings, check the design using critical car templates or design software for the B85 vehicle to AS/NZS 2890.1
- Design driveway profiles so that vehicles can use the driveway satisfactorily.

### Batters

Requirement: Accommodate differences in level across the road between road reserve boundaries by the following measures used individually or combined:

- Cutting at the boundary on the high side and providing the verge at normal level and crossfall.
- Battering at the boundary with a minimum verge of 3m width against the kerb constructed at standard crossfall for the purpose of pedestrian footway in urban areas.

Batter slopes: Design the batter slopes considering the following factors:

- Recommendations of geotechnical investigations.
- Batter stability and safety.
- Available width of road reserve.
- Landscape requirements.
- Maintenance costs and accessibility requirements.

Batter slopes: To Austroads AGRD03 Table 4.11 but where vegetation or grass maintenance by a slasher or by hand equipment is required, no steeper than 4:1.

Benches: Provide benches for high batters > 10 m vertical height or batters on unstable ground. Provide benches as shown in Austroads AGRD03 Figure 4.14.

- Minimum width of bench: 3 m.
- Maximum crossfall: 10%.
- Preferred bench width for road safety, maintenance and drainage: 5 m.

### Roadside drainage

General: Provide appropriate drains to remove water from the road and its surroundings and to maintain road safety and pavement strength to Austroads AGRD03 clause 4.6.

- Table drain: Provide a dish drain, or similar structure along the invert of table drains, seal the outer edges of the pavement, the shoulder verges and the drain lining where scour is likely to occur to Austroads AGRD03 Figure 4.16. Provide the following slopes:
  - . Side slopes: < 4H:1V.
  - . Desirable slope: 6H:1V.
  - . The roadside drain shall have an invert level at least 200mm below the lowest point in the pavement (base or subbase) layers.
- Catch drains: Provide catch drains to prevent overloading of the table drain and scour of the batter face at least 2 m from the edge of cuttings to minimise possible undercutting of the top of the batter.
- Median drains: Provide median drains with side slopes 10H:1V to reduce the chance of vehicle overturning. Where a depressed median is used, design with a minimum 10 m width. Place the invert of the median drain below subgrade level to facilitate drainage of pavement layers.
- Kerb and channel: Provide kerb and channel to perform the following:
  - . Collect and convey surface drainage to a discharge point.
  - . Delineate the edges of the carriageway.
  - . Separate carriageways from areas dedicated to footpath users.
  - . Support the edge of the base course of the pavement.
  - . Reduce the width of cut by substituting an underground drainage system in place of table drains.
- Kerb type: Select the kerb type from the following:
  - . Midcoast Council – Standard drawing SD 0107 for kerb and gutter and dish-drains
  - . High profile barrier kerbs
- Kerb placement: Conform to the following:
  - . Provide barrier kerb for high traffic volume roads.

- . Provide barrier kerb for lightly trafficked Local roads, adjacent to parking lanes and parking areas and bus bays to reduce the risk to pedestrians, or adjacent to areas such as public open space where required to discourage unauthorised vehicle access.
- . Provide layback kerb on sub-arterial roads to allow for off-road parking and for continuous access to property.
- Kerb location: Place kerb and channel with the clearance between the face of the kerb and edge of the traffic lane to Austroads AGRD03 Table 4.14.
- ~~— Kerb and channel in rural roads: Provide kerb and channel on both sides of roads and piped drainage in all rural residential subdivisions.~~

### Scour protection

Requirement: Provide scour protection of roadside drainage and table drains depending on the nature of the soils, road gradients and volume of stormwater runoff.

Protection of the works: Provide concrete lined channels, turfing, rock pitching, grass seeding, individually or in combination. Carry out geotechnical investigations to determine the level and extent of any protection works before proceeding to final design stage.

### Medians

General: Provide medians to improve the safety and operation of urban and rural roads with multiple lanes.

Median type: Select raised or depressed type to Austroads AGRD03 Figure 4.21.

Median width: Minimum urban median width to Austroads AGRD03 Table 4.15 or as governed by drainage or maintenance requirements (see Roadside drainage clause above).

Median slopes: Provide median slopes to Austroads AGRD03 Table 4.16.

Median transitions: Provide appropriate transition to safely merge and diverge vehicles to Austroads AGRD03 Figure 4.25.

### Bicycle lanes

General: Consider provisions for cyclists in the road design as required by DA consent conditions or MidCoast Council cyclist route plans to Austroads AGRD03 clause 4.8 and provide adequate space for cyclists to share the road safely and comfortably by providing on-road bicycle facilities in the form of the following:

- Separate bicycle lanes: Provide separation from other motor traffic with exclusive bicycle lane on the left side of the road by pavement markings and signs.
- Road shoulders.
- Widened lanes for joint use by bicycles and other vehicles.

Bicycle lane width: To Austroads AGRD03 Table 4.18.

Restriction: Provide a minimum bicycle width of 2 m in congested areas.

Minimum clearance with adjacent traffic on local roads: 1 m.

### High occupancy vehicle (HOV) lanes (Not used in the MidCoast area)

~~General: If there are any public transport services proposed in the route, provide HOV priority lanes for public transport in conformance with the following:~~

- ~~— Shoulder width: 3.5 m.~~
- ~~— Intermittent bays: Provide bays with appropriate length tapers to provide safe movement of vehicles.~~
- ~~— Provide access to public transport in conformance with the Disability Discrimination Act 1992.~~

~~Bus lane width: On new roads, conform to the following:~~

- ~~— To Austroads AGRD03 Table 4.22.~~
- ~~— Minimum width between the kerbs:~~
  - ~~— If bicycle lanes are provided: 15 m.~~
  - ~~— If bicycle lanes are not provided: 11.6 m.~~
- ~~— Width of kerbside bus lanes: To Austroads AGRD03 Table 4.23.~~

### On-site parking

Requirement: Provide onsite parking for developments as required by Council's Development Control Plan (DCP). Where the type of development is not covered by the DCP, a Traffic Impact Assessment (TIA) is to determine the demand for on-site parking to Austroads AGTM11 and Council's **Development Engineering Handbook**.

Design criteria:

- Accommodate on-site parking requirements for normal levels of activity associated with any land use.
- Do not impede through traffic.
- Dimensions: Allow convenient and safe access and usage.
- Non-residential land uses:
  - . Number of parking spaces: To parking standards as determined by the relevant authority.
  - . Layout and access: To AS/NZS 2890.1.
  - . Parking for people with disabilities: To AS/NZS 2890.6 and to the Disability Discrimination Act 1992.
- ~~— Residential land use: Number of parking spaces: Conform to the following:
 
  - ~~· Single dwelling allotment: Provide two car parking spaces (which may be in tandem).~~
  - ~~· Multi-unit residential developments: Provide three spaces on-site for each two dwelling units.~~~~
- Minimum dimension: Include one space for each residential unit within the allowable building area and with a minimum dimension to AS/NZS 2890.1.

### On-street parking

Standards: To AS 2890.5, Austroads AGRD03 clause 4.10 and Austroads AGTM11.

Road reserve parking: Provide adequate parking within the road reserve for visitors, service vehicles and any excess resident parking.

Future spaces: On single lane carriageways, provide one space for each two allotments on the verge within 25 m of each allotment, with scope to provide one additional space for single dwelling allotments or for each two units in a multi-unit development if required at a future time.

Short term truck parking: On single lane carriageways, combine a number of verge spaces to provide for short term truck parking within 40 m of any allotment.

Verge and carriageway parking: On single lane access streets, provide parking spaces within the verge. Provide verge and carriageway parking in conformance with the following:

- Adequate dimensions.
- Convenient and safe to access.
- Well defined with traffic control devices.
- All-weather surface.
- No restriction to the safe passage of vehicular, disabled and pedestrian traffic.

Joint use: For non-residential land uses, provide the opportunity for maximum joint use of shared parking by a number of complementary uses.

On-street parking dimensions: Conform to AS 2890.5 On-street parking or the following:

- Single (car) space: 6.5 m x 2.5 m.
- Combined spaces for two cars: 13.0 m x 2.5 m.
- Truck parking: 20 m x 2.8 m with adequate tapers at both ends to allow parking manoeuvres determined to Austroads AP-G34.

Material: Construct all verge spaces and indented parking areas of concrete, interlocking pavers, lawn pavers, bitumen with crushed rock or other suitable base material designed to withstand the loads and manoeuvring stresses of vehicles expected to use those spaces.

Angled parking: Provide angled parking only in accordance with a Council-adopted town centre master plan, or on Access streets and Local streets where speeds do not exceed 40 km/h.

Angled parking space widths: To AS 2890.5 Table 3.3.

### Off-street parking within the public road reserve

Standards: Such parking is generally not supported by Council unless it primarily serves a public purpose, and/or it will mitigate unacceptable safety or efficiency impacts that would result from on-street parking. If supported, design to AS/NZS 2890.2, Austroads AGTM11 and Austroads AGRD06B.

### Service roads and footpath

General: Provide service roads for access to the abutting property or control access to the arterial road from the abutting property.

Minimum service road lane width: To Austroads AGRD03 Table 4.26.

Access to allotments: Adopt a carriageway width to provide for unobstructed access to individual allotments. Provide for drivers to comfortably enter or reverse from an allotment in a single movement, taking into consideration the possibility of a vehicle being parked on the carriageway opposite the driveway.

Minimum service road carriageway width for roads with low traffic volumes: To Austroads AGRD03 Table 4.27.

Operating speed: 40 to 60 km/h.

Outer separator width: To Austroads AGRD03 Table 4.28.

Urban border: **Provide** urban borders comprising a pedestrian path and nature strip of 4 to 5m for collector streets and lesser order roads, and 5m for distributor roads and above. The combination of roadway, median and urban border widths will dictate the minimum road reserve width.

Typical urban border slopes: Conform to the following:

- For footpaths:
  - . Desirable: 1%.
  - . Maximum: 2.5%.
- Nature strip:
  - . Grassed soil: 4 to 10%.
- Determine minimum slope on urban borders by considering the drainage.
- Determine the maximum slope by considering the terrain and provision of access at driveways.

Footpaths: Provide footpaths either adjacent to the roadway or separated from it by a nature strip.

- **Requirement: For new developments, the minimum required footpath provision is to be determined with reference to Council's Development Engineering Handbook.**
- Standard: To Austroads AGRD06A.
- Minimum desirable width: 1.2 m.
- Crossfall: Varies from flat to 2.5%.

### Bus stops

New bus stops: In conformance with the requirements of the Disability Discrimination Act 1992 and other road authorities and transport agency disability standards which outline the requirements of the access paths, manoeuvring areas, ramps, waiting areas, surfaces and tactile ground surface indicators.

Urban bus stops: To Austroads AGRD03 Figure 4.51.

Rural bus stops: Locate bus stops in the road shoulder between the carriageway and table drain.

Minimum shoulder width for a bus stopping area: 3 m.

Minimum length of bus stopping area: 15 m.

For intermediate speed environments provide a longer sealed distance: 30 to 50 m.

## 3.6 SIGHT DISTANCE

### General

Stopping and sight distance: Provide stopping and sight distance at all points on the road conforming to Austroads AGRD03 Clause 5.

### Sight distance parameters

General: To Austroads AGRD03 Table 5.1 and the following:

- Driver reaction time: **Generally** adopt reaction time of 2.5 seconds for all roads. ~~If 1.5 seconds and 2 seconds reaction times are required, arrange approvals from the State Road Authority.~~

### Stopping sight distance

General: Conform to the following:

- General: To Austroads AGRD03 clause 5.3, ~~measured from an eye height of 1.15 m to an object height of 0.20 m.~~
- On sealed roads: Car stopping sight distance to Austroads AGRD03 Table 5.5.

### Sight distance on horizontal curves

General: Conform to the following:

- On horizontal curves: To Austroads AGRD03 Figure 5.4 which shows the relationship between horizontal sight distance, curve radius and lateral clearance to the obstruction.
- On horizontal curves with roadside barriers: Provide minimum shoulder widths and manoeuvre times for sight Austroads AGRD03 Table 5.7.

Horizontal curve perception sight distance: Provide sufficient sight distance by adopting larger crests for a horizontal curve. Do not provide a horizontal curve starting over a crest. Check sufficient visibility is provided for the curve by providing:

- Clear driver eye height: 1.1 m.
- A zero object height such that the driver can see the road surface in order to perceive the curvature.
- Driver visibility of a minimum of:
  - . 5 degrees of arc.
  - . 80 m of arc.
  - . The whole curve.

### 3.7 COORDINATION OF HORIZONTAL AND VERTICAL ALIGNMENT

#### Horizontal and vertical alignment coordination

General: Consider 3 dimensional coordination of the horizontal and the vertical alignment of the road to increase efficiency, safety, encourage uniform speed, improve aesthetics and provide harmony with the landform and drainage.

Reference: Austroads AGRD03 Clause 6 provides more information and figures on the coordination of horizontal and vertical alignment.

Requirement: Conform to the following:

- Avoid the use of minimum radius horizontal curves with crest vertical curves.
- Contain the crest vertical curves within horizontal curves to enhance the appearance of the crest by reducing the three dimensional rate of change of direction and to improve safety.
- Provide the same design speed of the road in both horizontal and vertical planes.
- Avoid sharp horizontal curves at or near the top of a crest vertical curve.
- Consider three dimensional combined horizontal and vertical stopping sight distance and minimum sight distance.
- Provide a horizontal curve to indicate the change in direction before introduction of vertical curve in both directions of travel.
- Be aware that a short vertical curve on a long horizontal curve or a short tangent in the grade-line between sag curves may adversely affect the road's symmetry and appearance.

Aesthetic consideration: Conform to the following:

- Provide horizontal curves slightly longer than the vertical curve, so that the curves fit with the terrain and are coincident.
- Provide long horizontal curves to short curves so that:
  - . The overtaking opportunities are not reduced.
  - . Small deflection angles avoid the appearance of a kink.
  - . Best appearance is provided for deviations around obstructions.
  - . The far tangent point is beyond the driver's point of concentrated vision for curves located at the end of long straights.

Drainage consideration: To ensure pavement drainage and to reduce the risk of aquaplaning, avoid very long crest and sag curves, that result in long sections of flat grades at the top and the bottom of the curves.

### 3.8 HORIZONTAL ALIGNMENT

#### General

Requirement: Provide horizontal alignment for safe and continuous vehicle operation at a uniform travel speed including the following:

- For low and intermediate speed rural roads and minor urban roads, where it is difficult to overcome the physical restrictions of curve radii, introduce curvature of a lower standard than the design speed of the project to Austroads AGRD03 Table 7.1.



- Provide tangents of suitable length as frequently as the terrain permits to facilitate overtaking manoeuvres.
- Determine the horizontal alignment from the design speeds for a particular street within the road hierarchy (see **Design Speed** clause 3.4).

### Horizontal curves

Types of horizontal curves: Conform to the following:

- Compound curves: Provide a smaller curve preceding a larger curve. Avoid diminishing radii at steep downgrades.
- Reverse curves: Do not use reverse curves unless there is sufficient distance between the curves to introduce full superelevation of the two curves without exceeding the standard rate of change of crossfall for a particular design speed.
- Transition curves: Introduce transition curves to join the straight and circular curves to provide smooth travel of vehicles within the traffic lane.
  - . Transition the horizontal curves with the transition length based on the superelevation runoff length for the recommended combination of speed, radius and superelevation.
  - . Avoid transition curves for large radius horizontal curves and where operating speed is less than 60 km/h.
  - . Provide transition paths for trucks, where lane width is no more than 3.5 m.

### Horizontal curves and tangent lengths

Speed/radius relation: Conform to the following:

- For a given design speed, utilise the minimum radius of curvature that drivers can safely negotiate.
- Avoid curves that progressively tighten (e.g. parabolic curves) and sudden reverse curves that drivers cannot anticipate as they have the potential to produce an uncomfortable sense of disorientation and alarm.

Speed restriction: Where speed restriction is provided by curves in a street, conform to the relationship between the radius of the curve and the desired vehicle speed.

Tangents: Determine appropriate lengths for tangents between speed restrictions, which may be curves, narrow sections or other obstructions.

Sight distance: Determine the sight distance on curves to Austroads AGRD03 clause 5.4.

### Side friction and minimum curve size

Recommended side friction factors: To Austroads AGRD03 Table 7.5.

Minimum radii for horizontal curves based on superelevation and side friction: To Austroads AGRD03 Table 7.6.

Maximum allowable deflection angles without horizontal curves: To Austroads AGRD03 Table 7.7.

### Superelevation

Criteria: Determine the superelevation by considering the following:

- Operating speed of the curve.
- Difference between the inner and outer formation levels in flat or urban areas.
- Stability of high vehicles when adverse crossfall is considered.
- Length available to introduce the necessary superelevation.

Minimum radius of curves: Determine from the following:

- Design speed.
- Minimum superelevation (or maximum adverse crossfall) at any point on the circular portion of the curve.

Low design speed and crowned pavement: Conform to the following:

- Access and Local streets: For design speeds of 50 km/h or less, and curves of 60 m radius or less, generally crown the pavement on a curve instead of superelevation.

Superelevation in rural roads: Design superelevation, widening and centreline shift and transitions in conformance with the Austroads AGRD03 clause 7.7.

High design speed: Conform to the following:

- Maximum superelevation for urban roads of higher design speeds: 6%.
- Maximum values of superelevation for different road types: To Austroads AGRD03 Table 7.8.



- Avoid any increase in the longitudinal grade leading to excessive crossfall at intersections.
- While it is desirable to superelevate all curves, limit adverse crossfall to 3%.

Length of superelevation development: Design superelevation development lengths to satisfy both rate of rotation and relative grade criteria to Austroads AGRD03 Table 7.9.

#### Plan transitions

Transitions: Conform to the following:

- Planning: Plan transitions on superelevated curves for appearance and to provide sufficient length in which to apply the superelevation.
- Urban roads: Superelevation may be applied to the road cross section by shifting the crown to 2 m from the outer kerb, as long as the road is not too wide.
- Access to adjacent properties: The axis of rotation of the cross section for urban roads is normally the kerb grading on either side which best allows access to adjacent properties and intersections.
- On the outside of superelevation, or where the longitudinal grade of the gutter is < 0.5%, adopt a crossfall of 63 mm in a 450 mm wide gutter.

Restrictions: In urban road design it is often impracticable to use plan transitions as kerb lines are fixed in plan and any shift requires carriageway widening. Widening on horizontal curves compensates for differential tracking of front and rear wheels of vehicles, overhang of vehicles, and transition paths. If proposed roads are curved, consider the adequacy of carriageway width.

Crossfall changes: Avoid abrupt changes in crossfall, which can cause discomfort in travel and create a visible kink in the kerb line. Conform to the following:

- The wider the pavement the longer the transition.
- Use superelevation transitions at all changes in crossfall, not just for curves. Drainage problems can arise with superelevation transitions which may require extra gully pits and steeper gutter crossfalls.
- Where crossfalls change at intersections, draw profiles of the kerb line. Calculated points can be adjusted to present a smooth curve.

#### Curves with adverse crossfall

General: Avoid adverse crossfall greater than 3% except for curves with an operating speed of no more than 70 km/h in constrained areas and for intersection turns and roundabouts.

Minimum radii with adverse crossfall: To Austroads AGRD03 Table 7.12.

Adverse superelevation: Provide adverse superelevation at the following:

- Property access controls.
- Channel drainage controls.
- Grading restrictions.
- Intersections to maintain visibility of the road surface.

#### Pavement widening on horizontal curves

Widening: Provide pavement widening on curves to Austroads AGRD03 Table 7.13 to maintain lateral clearance between vehicles taking into account the following factors:

- Radius of the curve.
- Width of lane on a straight road.
- Vehicle length and width.
- Vehicle clearance.

### 3.9 VERTICAL ALIGNMENT

#### General

Documentation: Show vertical alignment on a longitudinal section with a **suitable** vertical scale.

#### Vertical controls

Requirement: Consider the effect of the following features on the vertical geometric design:

- Existing topography.
- Geotechnical conditions.
- Existing intersections.
- Property entrances.
- Pedestrian access.

- Service utility assets.
- Median openings.

Minimum clearance above flood levels and water tables: As defined by the relevant road authority.

### Vertical clearances

General: Provide minimum vertical clearances over roadways and pedestrian/cycle paths to Austroads AGRD03 Table 8.1.

Precedence: If there is a conflict **between the policies of different authorities such as those listed below, the minimum height clearance is to meet that specified by the authority that has care and control of the trafficway being encroached upon:**

- Transport for NSW, with statutory responsibility for State and Regional classified roads,
- Council as road authority for local roads, or
- The railway or utility authority.

### Underground services

Clearance requirements: Consult the relevant authority to determine the minimum clearance requirements for:

— ~~Gas mains.~~

- Water mains.
- Stormwater drains.
- Sewer **mains.**
- Telecommunication cables.
- Underground electrical cables.
- Road authority assets, e.g. traffic signals and street lighting.

**Additional guidance on the minimum clearance requirements may be found in the SOCC - Guides to codes and practices for street openings.**

### Longitudinal gradient

General: Provide grades as flat as possible, consistent with longitudinal drainage requirements so that all vehicles operate at the same speed. Conform to the following minimum grades:

- Road with kerb and channel:
  - . Minimum desirable grade: 1%.
  - . **Reduced minimum grade: 0.5% will cause frequent siltation and is only acceptable where sufficient fall is not feasible due to surrounding topography.**
  - . Absolute minimum grade: 0.3% - **requires justification as above.**
- Roads in cut:
  - . Unlined drains: 0.5%.
  - . Lined drains: 0.3%.
- Roads without kerb and channel and not in cut: 0%.
- Minimum gradient of 0.5%.
- In very flat conditions: Reduce grade to 0.3%.
- If underground drainage with gully pits or other special works are used, consider near level grades. Provide variable crossfall to achieve the required grade in the gutter.

Maximum grade: To Austroads AGRD03 Table 8.3.

Intersections: Conform to the following:

- Longitudinal grade of the minor street on the approach to an intersection: < 4%.
- Design actual gradient dependent on the type of terrain.
- Interrelate the design of the road alignments and the grades used.
- Avoid a steep grade on a minor side street if vehicles have to stand waiting for traffic in the major road.

Maximum grade in cul-de-sacs and turning circles: < 5 %.

### Vertical curves

Criteria: Design vertical curves in conformance with the following:

- Provide vertical curves like simple parabolas on all changes of grade exceeding 1%.

- Desirable minimum design speed: 40 km/h.
- The length of the crest vertical curve for Stopping Sight Distance: To Austroads AGRD03 Table 8.7.
- Limit the length of crest curve with 0.3% to 0.5% grade: 30 to 50 m.

**Reference:** Factors affecting design of crest and sag vertical curves are covered in Austroads AGRD03 Section 8.6.3 and Figure 8.7. These factors are sight distance, and riding comfort and drainage constraints.

Sag curves: Provide the lengths of sag vertical curves to Austroads AGRD03 clause 8.6.4 and the following:

- For kerbed roads: Limit the maximum length of sag curves with less than 0.3% grade to 30 m.
- Maintain a minimum grade of 0.5% in the kerb and gutter by warping of road cross sections at sag points.
- Make provisions for draining both the road surface and the subgrade.
- To minimise discomfort due to rapid changes in vertical acceleration when passing from one grade to another, limit the vertical acceleration generated on the vertical curve to the following:
  - . For desirable riding comfort: 0.05 g.
  - . For minimum riding comfort: 0.10 g.

where g is the acceleration due to gravity.

Sight distance on sag curves: To Austroads AGRD03 clause 8.6.5.

Side road intersections: Locate intersections of roads at a safe distance from a crest, determined by visibility from the side road. If it is proposed to locate intersections of a side road where a crest occurs, provide details with justifications.

### 3.10 AUXILIARY LANES

#### General

Requirement: Provide auxiliary lanes adjacent to the through traffic lanes to enhance traffic flow and maintain the required level of service where an Arterial road meets with the Distributor road, Collector or Local roads.

#### Types of auxiliary lanes

Speed change lanes: Provide speed change (acceleration or deceleration) lanes at intersections or interchanges to allow an entering vehicle to access the traffic stream at a speed approaching or equal to 85<sup>th</sup> percentile speed of the through traffic.

Overtaking lanes/climbing lanes: Provide overtaking lane lengths to Austroads AGRD03 Table 9.2 and merge sight distance at the end of overtaking to Austroads AGRD03 Table 9.3.

Slow vehicle turnouts: Provide a short section of paved shoulder to allow vehicles to pull aside and be overtaken. Provide turnout lengths of 60–160 m for average approach speed of 30–90 km/h and a width of 3.7 m.

#### Cross-section

Auxiliary lane width: Provide auxiliary lane width not less than the normal width for that section of the road.

Shoulder width: 1 m.

Crossfall: Provide same crossfall of the auxiliary lane as the adjacent lane.

### 3.11 INTERSECTIONS

#### Design criteria

Requirement: Consider the following factors in the location and design of intersections:

- Alignment and grade of approach road.
- Provision of drainage.
- Interference with public utilities.
- Property access.
- Topography.
- Natural and built environment.

**Function, current situation and future considerations:** To Austroads AGRD04 Table 4.1.

Road users considerations: To Austroads AGRD04 Table 3.1.

Design criteria: To Austroads AGTM06.

Guidance: Austroads AGTM06 Table 2.1 provides a summary of road intersection types which influences the type of treatment and operation adopted at specific sites in urban and rural intersections.

### Intersection turning movements

Requirement: Minimise the number of turning movements at intersections or junctions that a driver is required to undertake to reach a particular property within the development.

### Intersection types

Traffic management: Select the type of intersections for traffic management in conformance with Austroads AGTM06 Table 2.4.

The basic forms of an intersection may include the following:

- Signalised, unsignalised or a roundabout.
- Channelised (i.e. has traffic islands and/or medians) to develop specific types of intersections, or unchannelised.
- Flared, to provide additional through and/or turning lanes, or unflared.
- Due to different driver expectations for an urban or rural intersection, different design and traffic management guidelines will apply.

References: Austroads AGRD04 and Austroads AGRD04A include design consideration for urban and rural intersections and Austroads AGTM06 covers design considerations for traffic management.

### Location

Requirement: Locate intersections to Austroads AGRD04 Table 4.2 and the following:

- Streets intersection: Preferably at right-angles and not less than 70°.
- Landform: Allowing clear sight distance on each of the approach legs of the intersection.
- Minor street: Intersect the convex side of the major street.
- Vertical grade lines at the intersection: Conform to the following:
  - . Provide a desirable grade of 3% with a maximum of 5%.
  - . Allow for any direct surface drainage.
- For a left turn, where two minor side streets intersect a major street in a staggered pattern, provide a minimum centreline spacing **between the minor legs** of 40 m.

Traffic volumes: Design for all movements to occur safely without undue delay. Use projected traffic volumes in designing all intersections or junctions on Distributor roads.

State roads and national highways: Design intersections for the junction of Council's roads with existing state rural or urban roads and national highways to Austroads AGRD04.

Approval of State Road Authority: Design intersections with state roads or national highways in conformance with the requirements of the State Road Authority.

Sight distance: Provide adequate stopping and sight distances for horizontal and vertical curves at all intersections.

Parking: Where required, make appropriate provision for vehicles to park safely.

Drainage: Design the road reserve cross-section profile to satisfy the drainage function of the carriageway and/or road reserve.

Turning movements: Accommodate all vehicle turning movements in conformance with Austroads AP-G34 **Design Vehicles and Turning Path Templates** and the following:

- For intersection turning movements involving Distributor roads: Provide for the design semi-trailer with turning path radius 19.0 m.
- **For Industrial roads: Provide for B-Doubles and PBS Level 2B combinations up to 30m in length.**
- For intersection turning movements involving Local streets or Collector streets, but not Distributor roads: Provide for the design single unit bus with turning path radius 12.5 m.
- For intersection turning movements on access streets but not involving Distributor roads, collector streets or local streets: Provide for the **Medium Rigid (8.8m) fire truck or garbage collection vehicle** used by **Council**.
- For turning movements at the head of **cul-de-sacs: Provide a minimum 8.5m radius at the turning head, or greater in bushfire prone areas as required by Council's AUS-SPEC 0013 Bushfire Protection (Design) worksection.**

Turning radii at intersections or driveways on Distributor road: Design for the intended movements to Austroads AGRD04 Table 5.1.

Bus facilities: Provide minimum length required for bus lane on an intersection to Austroads AGRD04 Table 6.1.

~~Minimum width of bicycle and bus lanes: To Austroads AGRD04 Table 6.2.~~

### Sight distance

Requirement: Provide adequate horizontal and vertical sight distance at intersections. Examine each intersection location for conformance with the criteria for Approach Sight Distance (ASD), Minimum gap sight distance (MGSD) and Safe Intersection Sight Distance (SISD). Ensure ASD and SISD are achieved for all intersections, and MGSD where appropriate. Reposition an intersection if required to obtain conformance with the following sight distance criteria:

- ASD: To Austroads AGRD04A Table 3.1 and grade corrections to Austroads AGRD04A Table 3.4 for sealed roads.
- MGSD: To Austroads AGRD04A Tables 3.5 and 3.6 for various speeds.
- SISD: Provide SISD for sealed roads to Austroads AGRD04A Tables 3.2 and 3.3.

### Type of turn treatments

General: Provide the appropriate type of right-turn and left-turn treatments based on the traffic volume warrants in AGRD04A Figure A 10 from the following:

- Basic turn treatment (Type BA):

	Urban	Rural
<b>Basic Left (BAL)</b>	If necessary for existing roads (EDD) to AGRD04A Figure A 37	AGR04A Figure 8.2
<b>Basic Right (BAR)</b>	AGR04A Figure 7.6	AGR04 Figure A 28

- Auxiliary lane turn treatment (Type AU): Provide short lengths of auxiliary lane to improve safety on high speed roads where an arterial road meets with Distributor road, collector or local roads. Provide the following turn treatments as appropriate:

	Urban	Rural
<b>Auxiliary Left (AUL)</b>	AGR04A Figure 8.6	AGR04A Figure 8.4
<b>Short Auxiliary Left (AUL(S))</b>	AGR04 Figure A 39	AGR04A Figure 8.3
<b>Auxiliary Right (AUR) and Short Auxiliary Right</b>	Not as safe as a channelised treatment at unsignalised intersections, so use is generally to be avoided.	

- Channelised turn treatment (Type CH):

	Urban	Rural
<b>Channelised Left (CHL)</b>	AGR04 Figure A 40 or Figure A 41 (with acceleration lane)	AGR04A Figure 8.5
<b>Channelised Right (CHR)</b>	AGR04A Figure 7.8	AGR04 Figure A 30
<b>Short Channelised Right (CHR(S))</b>	AGR04A Figure 7.7	AGR04 Figure A 29

Staggered T-intersections: Rural staggered T intersections may be 'right to left' or 'left to right' type to Austroads AGRD04 Section A.10.4. Consider traffic volumes and available width in design selection. Provide staggered T-intersections by:

- Setting out the alignment of the minor roads on new major roads to form a staggered T-intersection.
- Realigning one or both minor road legs of an existing intersection.

## 3.12 ROUNDABOUTS

### General

Design criteria: To Austroads AGRD04B Section 4 and Austroads AGTM06 Section 3. If alternative criteria is proposed, submit alternative criteria for consideration.

Requirement: Provide the following:

- Functional design: To achieve safety of all users and traffic performance.

- Entry width: To provide adequate capacity.
- Adequate circulation width: Compatible with the entry widths and design vehicles (e.g. buses, trucks, cars).
- Central islands: To Austroads AGRD04B Table 4.1 with a size sufficient only to give drivers guidance on the manoeuvres expected.
- Deflection of traffic to the left on entry: To promote gyratory movement.
- Adequate deflection of crossing movements to ensure low traffic speeds.
- A simple, clear and conspicuous layout.
- Design so that the speed of all vehicles approaching the intersection will be less than 50 km/h.
- Landscape and street furniture: To Austroads AGRD04B Section 7.3.

Approval: Obtain approval of roundabouts from the Council and the relevant State Road Authority.

### 3.13 TRAFFIC CALMING

#### General

Design criteria: Calming devices (e.g. thresholds, slowpoints, speed humps, chicanes and splitter islands) to AS 1742.13 and Austroads AGTM08.

LATM Type: Select the type of local area traffic management devices from Austroads AGTM08 Table 7.1.

Local area traffic management (LATM) devices: Conform to the following:

- Streetscape:
  - . Reduce the linearity of the street by segmentation.
  - . Avoid continuous long straight lines (e.g. kerb lines).
  - . Enhance existing landscape character.
  - . Maximise continuity between existing and new landscape areas.
- Reference: [IPWEAQ - Complete streets – Guidelines for urban street design is a useful guideline for planning, designing and developing streets.](#)
- Location of devices/changes:
  - . Other than at intersections, maintain consistency with streetscape requirements.
  - . For compatibility with existing street lighting, drainage pits, driveways, and services.
  - . Slowing devices optimally at spacings of 100 m to 150 m.
- Design vehicles:
  - . Make sure emergency vehicles are able to reach all residences and properties.
  - . Local streets with a feeding function between arterial roads and minor local streets may be designed to Austroads AP-G34 turning templates.
  - . Bus routes: Allow buses to pass without mounting kerbs and with minimal discomfort to passengers.
  - . Provide for building construction traffic in newly developing areas where street systems are being developed in line with LATM principles.
- Control of vehicle speeds:
  - . Reduce speed using devices which shift vehicle paths laterally (slow points, roundabouts, corners) or vertically (humps, platform intersections, platform pedestrian/school/bicycle crossings).
- Create a visual environment conducive to lower speeds. This can be achieved by segmenting streets into relatively short lengths (less than 300 m), using appropriate devices, streetscapes, or street alignment to create short sight lines.
- Visibility requirements (sight distance):
  - . Provide critical sight distances so that evasive action may be taken by either party in a potential conflict situation. Relate sight distances to likely operating speeds.
  - . Consider sight distance to include those of and for drivers, pedestrians and cyclists.
  - . Design for night time visibility of street features. Locate speed control devices near existing street lighting if practicable and delineate all street features/furniture for night time operation. Provide



additional street lighting at proposed new speed control devices located away from existing street lighting.

- Safety: Provide roadside design that conforms with Austroads AGRD06 including:
  - . Safety barriers.
  - . Treatment options.
  - . Steep down grades.

### Critical dimensions

Dimensions: Conform to the following:

- Pavement narrowing:
  - . Single lane between kerbs: 3.50 m.
  - . Single lane between obstructions: 3.75 m.
  - . Two lane between kerbs: Minimum 5.50 m.
- Plateau or platform areas: 75 mm to 150 mm height maximum, with 1 in 15 ramp slope relative to road grade.
- Width of clear sight path through slowing devices: 1.0 m maximum (i.e. the width of the portion of carriageway which does not have its line of sight through the device blocked by streetscape materials, usually vegetation).
- Mountable areas required for the passage of large vehicles: To appropriate turning templates.

Approval: Obtain approval of traffic calming devices from the Council.

### Bus routes

Criteria: Conform to the following:

- Design the road hierarchy to cater for buses on routes identified by the Council.
- Location of bus routes and bus stops: **Where the site is within 400m of a bus route or is to include new collector or Distributor roads, design the road layout so that no residents have to walk in excess of 400 metres to catch a bus.**
- Design roads above the Local street level in the network hierarchy as bus routes.

### Bus route criteria table

Road	Carriageway Width (min)	Stops (Spacing)	Bays
Collector	10 m (3.5m lanes plus 1.5m shoulders – see Clause 3.5)	400 m**	Single
Distributor	11 m	400 m	Shelters
Arterial	13 m	400 m	Shelters and bays
* Collector roads not identified as bus routes may have 7 m carriageways.			
** Loop roads with single entry/exit only require stops and bays on one side road. Shelters are subject to Council's requirements.			

## 4 DOCUMENTATION

### 4.1 GENERAL

#### Design process

Design development process: Develop a flow chart to capture the design process, include processes such as the brief and scope development, investigative studies and analyses, consultation, selection of design parameters/design inputs, design reviews, major design decisions made or design outputs, approvals and critical dates.

**Reference: Austroads AGRD08 provides guidance on the design development process and requirements/activities for each phase of the design process.**

Design review, verification and validation: Provide design documentation to Austroads AGRD08.



**Related design documentation requirements**

Drainage and run-off: To the *0074 Stormwater drainage (Design)* and *0043 Subsurface drainage (Design)* worksections.

Earthworks, contours, cut and fill: To the *0021 Site regrading* worksection.

Footpaths, pathways and cycleways: To the *0044 Pathways and cycleways (Design)* worksection.

Pavement structure: To *0042 Pavement design* worksection.

**Approvals**

Requirement: Document any prerequisite for approval of the development advised by the following authorities:

- Council for:
  - . Land use planning and permissibility.
  - . Heritage items.
  - . Construction staging and traffic management.
  - . Landscaping and verge design.
  - . Access provisions.
  - . Tree protection and vegetation clearing.
  - . Water supply and sewerage infrastructure impacts.
  - . Stormwater drainage control.
- ~~Planning and water resources department: For general land use, salination prevention measures, existing water bodies that may be affected, and areas of heritage significance.~~
- Transport for NSW: for matters affecting classified (State or Regional) roads or traffic signals.
- The EPA: For other general environmental impact requirements.
- Utilities authority: For any public or private utility affected by the development.
- Rail transport authority: For crossings and rail conflicts.

Authority audits: Include first party, external or third party audits, for design process or design products, required by the relevant authority.

Reference: See Austroads AGRD08 for guidance on the different types of audits. For example, road authorities or Councils may require third party audits be carried out either as part of prequalification or as part of the design contract for a specific project.

**4.2 DRAWINGS****Drawing sheets**

Requirement: Provide separate sheets for the following:

- Cover.
- Key/locality plan and legend.
- Plans.
- Longitudinal sections.
- Cross-sections.
- Structural details.
- Standard drawings.

Minimum requirements: Complete the relevant checklist in Annexure B of the *0010 Quality requirements for design* worksection for the development. Make sure required items are included in the design documentation.

**Drawing presentation**

Plain English: Drawings form part of the permanent record and are legal documents. Keep terminology in plain English, so that drawings can be easily read and understood by those involved in the construction of the Works.

Drawings size and format: Present drawings on A1 sheets unless otherwise authorised. **If an alternative sheet size is used, adjust the scales below in proportion so that features are easy to read.** Prepare clear and legible drawings with consistent lettering and style, and clearly referenced with notations and tables as appropriate.

Drawing scales: Conform to the following, or use closer scales if needed for readability:

- Plans:
  - . Generally: Minimum 1:500.
  - . Rural plans: Minimum 1:1000.
- Longitudinal sections:
  - . Horizontal: Minimum 1:500.
  - . Vertical: Minimum 1:100.
- Cross-sections: 1:100.

Requirement: Provide the following drawings, describing the geometric road layout for the development:

- Survey(s): Showing contours, original and proposed terrain, locations of existing and new roads. If required, include finished grades on a digital terrain model.
- Plans: Showing alignments of existing and new roads, access treatments, drainage structures, edges of pavement, roadside barriers and flares, clearing and grubbing limits, critical dimensions, cut/fill toes, utility conflicts, objects/items that are to be relocated or removed, fencing, and limits of construction.
- Ground profiles: Showing proposed grades, vertical curve data, horizontal alignment schematic, superelevation, existing and proposed culvert locations, surcharge and preload areas, and original ground profile.
- Typical sections drawings: Showing lane and shoulder widths, clear zone requirements, excavation and embankment slopes, stripping, and special treatments.
- **Geometry** (vertical and horizontal): Showing access movements, intersection movements, design vehicles (and turning templates), design speed, approaches and transitions, vertical clearances, and critical lane dimensions.
- Signing and pavement marking drawings: Showing new sign locations, schedule of signs required, sign removals and relocations.
- Construction staging drawings: Showing detours if required, any required cross-sections.
- Utility relocation drawings.
- Landscaping drawings: Showing verge treatments.
- Environmental drawings: Showing sensitive zones, limits and setbacks from environmental features.

### Design reports

Requirement: Provide a report including the following:

- Geotechnical field data.
- Noise studies, as required.
- Environmental and archaeological studies.
- Development connectivity: Include details of links and place functions.
- Strategies for achieving target operating speeds.

Environmental impact statement: Include details of potential impacts and measures adopted for minimising the impact.

### Design calculations

Calculations: Provide results and details of software used for relevant distance or curvature calculations. If friction is a factor in layout/geometry, note the pavement type assumed for surface conditions and noise minimisation.

Assumptions: Include any data used in the design calculation.

### Specifications

Construction documentation: Prepare technical specifications using the AUS-SPEC Construction worksection *Templates* from the National Classification System workgroups 02, 03, 11, 13.

### Design certification

Certificate: Provide a signed and dated design certificate using the template provided in **0010 Quality requirements for design worksection** as evidence that a suitably qualified professional has reviewed all the design documents, including program and plans for the development, and can verify that the geometric road layout requirements for the development meet the Council and statutory requirements.

### 4.3 WORK-AS-EXECUTED

#### Work-as-executed documents

Work-as-executed drawings: Provide an additional set of final construction drawings for the purpose of recording the work completed by the Contractor.

Work-as-executed drawing format: Provide in open digital (not requiring specific software) LandXML or CAD format (e.g. DXF), and PDF copies.

Data standard for road management: To Austroads AP-R597.

#### Final certification of completed works

Requirement: See Clause M3M3 in regard to the completion and handover process.

## 5 ANNEXURE

### 5.1 ANNEXURE - REFERENCED DOCUMENTS

The following documents are incorporated into this worksection by reference:

AS 1742		Manual of uniform traffic control devices
AS 1742.13	2009	Local area traffic management
AS 2890		Parking facilities
AS/NZS 2890.1	2004	Off-street car parking
AS/NZS 2890.2	2020	Off-street commercial vehicle facilities
AS 2890.5	1993	On-street car parking
AS/NZS 2890.6	2009	Off-street parking for people with disabilities
AS/NZS 3845		Road safety barrier systems and devices
AS/NZS 3845.1	2015	Road safety barrier systems
AS 5488		Classification of Subsurface Utility Information (SUI)
AS 5488.1	2019	Subsurface utility information
AS 5488.2	2019	Subsurface utility engineering
Austroads AGRTP	2009	Guide to road transport planning
Austroads AGRD		Guide to road design
Austroads AGRD01	2015	Introduction to road design
Austroads AGRD02	2019	Design Considerations
Austroads AGRD03	2016	Geometric design
Austroads AGRD04	2017	Intersections and crossings - General
Austroads AGRD04A	2017	Unsignalised and signalised intersections
Austroads AGRD04B	2015	Roundabouts
Austroads AGRD06A	2017	Paths for walking and cycling
Austroads AGRD06	2020	Roadside design, safety and barriers
Austroads AGRD06B	2015	Roadside environment
Austroads AGRD07	2008	Geotechnical investigation and design
Austroads AGRD08	2009	Process and documentation
Austroads AGPT		Guide to Pavement Technology
Austroads AGTM		Guide to traffic management
Austroads AGTM03	2020	Traffic studies and analysis
Austroads AGTM04	2020	Network management strategies
Austroads AGTM05	2020	Link management
Austroads AGTM06	2020	Intersections, interchanges and crossings management
Austroads AGTM07	2020	Activity centre traffic management
Austroads AGTM08	2020	Local street traffic management
Austroads AGTM11	2020	Parking management techniques
Austroads AGTM12	2020	Integrated transport assessments for developments
Austroads AGTM13	2017	Road environment safety
Austroads AP-C87	2015	Austroads glossary of terms
Austroads AP-G34	2006	Austroads design vehicles and turning path templates(Includes CD)
Austroads AP-R518	2016	Safe system roads for local government
Austroads AP-R587	2019	Road Risk Assessment, Case Studies and Engagement Guidance for Speed Management

Austrroads AP-R597	2019	Data Standard for Road Management and Investment in Australia and New Zealand Version 3.0
Austrroads AP-T78	2007	Managing impact of rising water tables and salinity on remaining pavement life
Austrroads AP-T121	2008	Impact of rising water tables and salinity on pavement performance
Austrroads AP-T146	2009	Relationships between crash risk and the standards of geometric design elements
AUS Gov Act No. 135	1992	Disability Discrimination Act 1992
IPWEAQ	2010	Complete streets - Guidelines for urban street design
MidCoast Council		Development Engineering Handbook
MidCoast Council		AUS-SPEC Infrastructure Specifications
Roads and Maritime Services		Supplements to Austrroads
SOC Guide	2018	Guide to codes and practices for streets opening

## 6 ANNEXURE M – MIDCOAST COUNCIL SPECIFIC CLAUSES

M1.	Variations to or non-conformances with Council's AUS-SPEC are to be evaluated with reference to the procedure in Council's <i>Development Engineering Handbook</i> . Acceptance is to be obtained in writing from: <ul style="list-style-type: none"> <li>a) an authorised representative of Council's Director of Infrastructure and Engineering Services, or</li> <li>b) an accredited certifier where they are the Principal Certifier and hold the relevant accreditation category for the type of work.</li> </ul>	<b>Variation procedure</b>
M2.	This specification applies in addition to any development consent (DA) conditions. If there is any inconsistency, the conditions of consent shall prevail.	<b>DA conditions</b>
M3.	Refer to the MidCoast Council <i>Development Engineering Handbook</i> for final inspection, works-as-executed and handover requirements.	<b>Completion</b>
M4.	(See Clause 1.6) Within the MidCoast Council Local Government Area, the following road classifications also apply. The use of and approval of such road classifications shall be as confirmed in any DA conditions. <ul style="list-style-type: none"> <li>a) <b>Industrial Road</b> The main function is to provide access to industrial areas and subdivisions. Industrial roads shall have a desirable 13m wide (minimum 11m) roadway formation to cater for large vehicle access and turning movements. Manoeuvring clearances, and where possible parking, should be provided during design development for truck combinations up to and including B-Doubles and Performance Based Standards (PBS) Level 2B vehicles up to 30m in length.</li> <li>b) <b>Commercial Laneway</b> The main function is to provide access to the rear of commercial properties. Commercial laneways are typically one-way, with 6m reserve width, and a 4m wide formed pavement and barrier kerbs.</li> <li>c) <b>Shareway</b> A shareway is a minor road that carries low traffic volumes and connects to a maximum of two access places with the objective of discouraging through traffic. A shareway is to provide access to no more than 3 residential allotments if a dead end, or no more than 6 if it forms a link between two access streets. The design is to encourage shared use by vehicles, pedestrians and recreational users, giving priority to users on foot. The total carriageway width should be reduced to the widths for a</li> </ul>	<b>Additional road classifications</b>

	service road given in Austroads AGRD3 Table 4.26 to reinforce the desired very low speed environment.							
M5.	Indicative design parameters for the various road classifications within the MidCoast Council area are given in the following Tables 1 and 2. Also refer to AUS-SPEC 0042 Pavement Design Clause 3.5 for the determination of appropriate design traffic (e.g. Equivalent Standard Axles).							<b>Road classification table</b>
<b>M5 Table 1. URBAN ROADS</b>								
<b>Road Class</b>	Shareway	Access Street	Local Street	Collector Street	Distributor Road	Industrial Road	Commercial Laneway	
<b>Lots served</b>	1 to 3 (1 to 6 if a through street)	2 to 30	30 to 100	100 to 500	>500	Industrial lots	Secondary frontage of commercial lots	
<b>Nominal Traffic (VPD)</b>	<60	<400	400 to 2000	2000 to 8000	8000 to 15000	Industrial traffic	Low	
<b>Width between kerbs</b>	5m	7m	8m	11m	15m	13m	4m	
<b>Nominal road reserve width</b>	12m	16m	17m	20m	24m	23m	6m	
<b>Kerb and gutter</b>	Optional	Roll top (RT type)	Roll top (RT type)	Barrier (SA type)	Barrier (SA type)	Barrier (SA type)	Barrier (SA type)	
<b>Nominal wearing course</b>	Concrete / asphalt (Note 1)	Asphalt (Note 1)	Asphalt (Note 1)	Asphalt (Note 1)	Asphalt (Note 1)	Asphalt (Note 1)	Asphalt (Note 1)	
<b>Pavement design traffic ESAs</b>	Minimum thick 200mm granular with	6 x 10 <sup>4</sup>	3 x 10 <sup>5</sup>	1 x 10 <sup>6</sup>	2 x 10 <sup>6</sup>	5 x 10 <sup>6</sup>	1 x 10 <sup>6</sup>	
<b>Drainage design</b>	5 year minor, 100 year major							
<b>Footpath</b>	No	As required	As required	Yes	As required	As required	No	

<b>Cycleway</b>	No	No	No	Yes	Yes	No	No
-----------------	----	----	----	-----	-----	----	----

Notes: 1. Where asphalt wearing surface is specified, it shall be a minimum of 40mm thick generally, and 50mm thick at cul-de-sac turning heads. Required thickness to cater for truck turning movements shall be adequately designed by a professional engineer at higher-order intersections and roundabouts.

<b>M5 Table 2. RURAL and RURAL-RESIDENTIAL ROADS</b>				
<b>Road Class</b>	<b>Rural Access Street</b>	<b>Rural Local Street</b>	<b>Rural Collector Street</b>	<b>Rural Distributor Road</b>
<b>Lots served</b>	≤5	5 to 30	-	-
<b>Nominal Traffic (VPD)</b>	≤50	50 to 200	200 to 500	>500
<b>Pavement / seal width</b>	5.5m (subject to bushfire assessment)	7m	9m	11m
<b>Nominal wearing course</b>	Gravel *	Gravel *	Bitumen seal	Bitumen seal
<b>Pavement design</b>	Minimum 200mm for subgrade CBR ≥ 5	Minimum 300mm for subgrade CBR ≥ 5	3 x 10 <sup>5</sup>	1x10 <sup>6</sup>
<b>Culvert design (minor / major)</b>	5 / 100 year	10 / 100 year	20 / 100 year	20 / 100 year

\* Where a new rural road connects to an existing bitumen road, the new road is to be sealed on its entire length. Additionally, MidCoast Council maintains a list of other 'roads to be sealed' and if the development fronts or connects to such a road, then it will be required to be sealed. Refer to *0052 Geometric unsealed road design* worksection for design of roads which are permitted to remain unsealed in accordance with the above table.

**7 AMENDMENT HISTORY**

0	30/11/2020	First Published
1	18/1/2021	Minor amendment in foreword.